

STEAM

PRICE LIST
2025



Via Gallo, 769
47522 Cesena (FC)
Italy

+39 0547 372881

info@effegibi.it
www.effe.it

STEAM

Elements to build your own Steam shower

Steam generators:

- 6 Touch&Steam Smart
- 10 Easystem Smart
- 16 Inside
- 20 Nuvola Smart

Doors and glass panels

- 44 Adapta
- 48 Spazioslide
- 50 Spaziofilo
- 54 Spazio
- 56 Tuttovetro Inside
- 61 Tuttovetro Contour

Insulation

- 63 Insulation kit 01-02-03

Fittings

- 66 Seat Mini
- 67 Bench Topkapi
- 68 Bench ready for the covering of choice

Accessories

- 73 Kneipp Shower Hose

- 77 General Terms and Condition of Sale



Steam generators


Touch&Steam Smart



8	Touch&Steam Smart		
		m³	kW
	45	3,5 - 4,5	4,5
	60	4,5 - 6,2	6
	90	6,2 - 9,2	9

Technical information

More information: www.effe.it

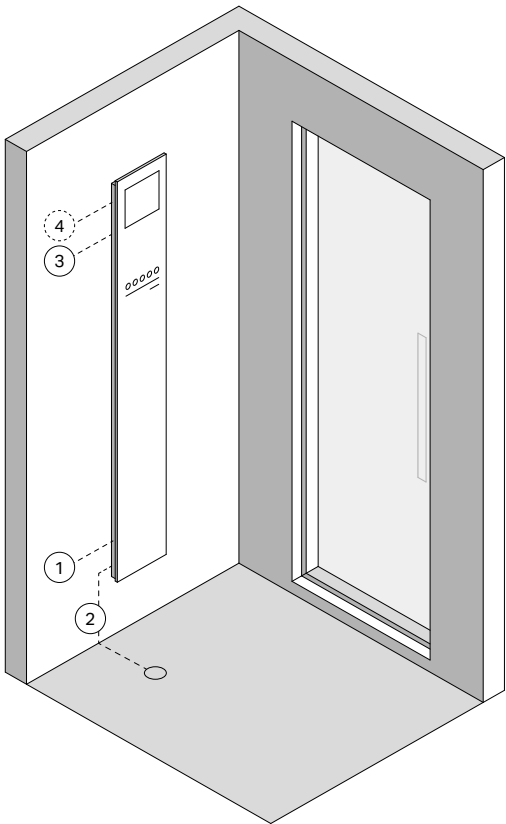

- 1 Water inlet
- 2 Water outlet
- 3 Electric power supply
- 4 Options connection

All work must be carried out by qualified personnel or by one of our Service Centres, based on local and international standards – CEI 64.8 (IEC 364 – 1). Make sure that the electric and plumbing connections for the steam generator have been correctly set up (water line with closing gate valve, outlet siphon, power line with suitable magnetothermal residual current device, etc.) according to the related technical specifications. Connect all piping in such a way that it may be disconnected (in the event of removal of the generator for maintenance). Use brass or copper piping only. Do not use galvanised or black PVC piping.

Create a space of 400mm x 1740 mm, for installation of the Touch&Steam Smart device.

- 1 Water inlet: set up the piping mounted flush with the casing with a 1/2" female thread. Hook up only cold water (max 25°C). Inlet water pressure must not exceed 8 bar (800 kPa). For best operation, water pressure should be max. 1.5 ÷ 2 bar (150 ÷ 200 kPa). CAUTION: if the water is medium hard or hard, it is recommended to install a softener upstream of the generator. Otherwise, the generator boiler may be subject to significant wear and tear.
- 2 Water outlet: set up 1/2" female, heat resistant (up to 70°C) siphoned piping mounted flush with the casing. The outlet pipe must ensure correct water outflow, therefore, a downward slope of at least 5° is recommended.
- 3 Sheath Ø 25 for the electric power supply: set up a power cable of suitable cross-section.
- 4 Sheath Ø 25 for connecting the options.



CERTIFIED PRODUCT



TOUCH&STEAM SMART

Technical card download 

TOUCH&STEAM SMART 45

Space volume (cubic metres): 3,5 - 4,5 in insulated space with the use of 3 cm thick insulation panels
Power: 4,5 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 6,6 Kg/h max

Counterbox	CH 90 00 0214	€ 915,00
Touch&Steam 45	HA CM TS 0037	€ 12.895,00
Total Price		€ 13.810,00

TOUCH&STEAM SMART 60

Space volume (cubic metres): 4,5 - 6,2 in insulated space with the use of 3 cm thick insulation panels
Power: 6,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 8,9 Kg/h max

Counterbox	CH 90 00 0214	€ 915,00
Touch&Steam 60	HA CM TS 0038	€ 13.360,00
Total Price		€ 14.275,00

TOUCH&STEAM SMART 90

Space volume (cubic metres): 6,2 - 9,2 in insulated space with the use of 3 cm thick insulation panels
Power: 9,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 13,1 Kg/h max

Counterbox	CH 90 00 0214	€ 915,00
Touch&Steam 90	HA CM TS 0039	€ 13.890,00
Total Price		€ 14.805,00

ECC 5.0 - Effe Comfort Control

This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.

 [More information](#)


ESS - Effe Sound System

You can listen to your favourite music inside the Hammam using a Bluetooth connection and your own device. The speakers are built into the Hammam.

 [More information](#)

Options


NOTE: TOUCH&STEAM SUPPORTS A MAXIMUM OF 1 LIGHT FIXTURE, TO BE SELECTED FROM EITHER RGB COLOUR THERAPY FIXTURES OR WHITE LED FIXTURES.

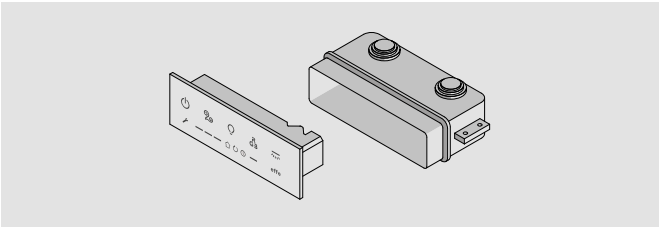

Remote touch-screen control panel

Control panel dimensions: cm 16,5 x 5
Mounting box dimensions: cm 16 x 7 x 4,5 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

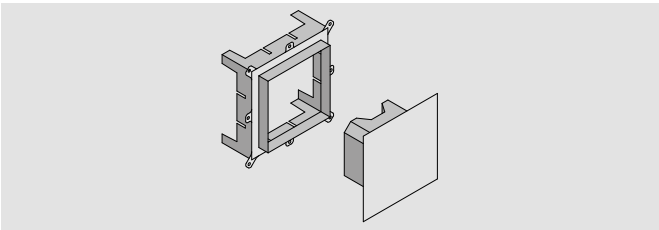

White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat IP X5 clas. 3000 K.

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

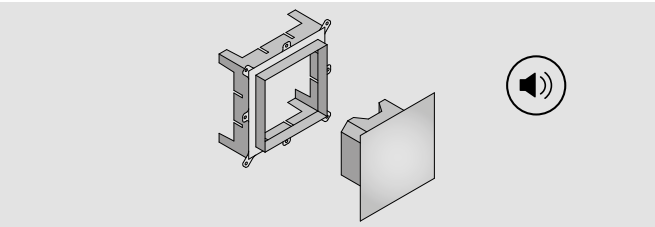

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat.
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm

 [More information](#)

Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00



Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).

Home-Automation Device	ME 99 00 0421	€ 775,00
------------------------	---------------	----------

DIMENSIONS

cm 23 x 3,7 x 165 h

COUNTERBOX DIMENSIONS

cm 40 x 10 x 173 h
with Schlüter waterproofing mat

MATERIALS

Screen-printed tempered glass panel
Painted aluminium RAL 9003

BUILT IN STEAM GENERATOR

Features:
> automatic boiler cleaning system
> water flow rate control system
> automatic water drainage system
> Automatic energy-saving function

TOUCH-SCREEN CONTROL PANEL

With backlit icons and temperature gauge

POWER STEAM FUNCTION

Steam diffusion and forced ventilation heating system

CONTAINERS FOR ESSENTIAL OILS

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

LIGHTING SYSTEM WITH LED RGB COLOUR THERAPY

5 fixed colours, 4 dynamic cycles and white light

ASPIRATION FUNCTION

HEATED BENCH FUNCTION

Easystem Smart




12 **Easystem Smart**

	m³	kW
30	0 - 3,5	3
45	3,5 - 4,5	4,5
60	4,5 - 6,2	6

Technical information

More information: www.effe.it

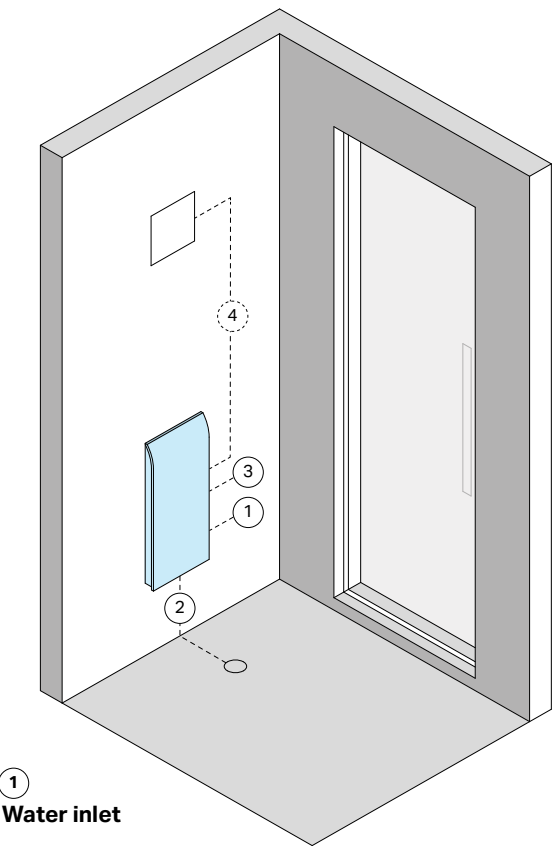

- 1 **Water inlet**
- 2 **Water outlet**
- 3 **Electric power supply**
- 4 **Options connection**

All work must be carried out by qualified personnel or by one of our Service Centres, based on local and international standards – CEI 64.8 (IEC 364 – 1). Make sure that the electric and plumbing connections for the steam generator have been correctly set up (water line with closing gate valve, outlet siphon, power line with suitable magnetothermal residual current device, etc.) according to the related technical specifications. Connect all piping in such a way that it may be disconnected (in the event of removal of the generator for maintenance). Use brass or copper piping only. Do not use galvanised or black PVC piping.
A space of 380 mm x 545 mm and at least 78 mm deep must be available to house the Easystem Smart device.

- 1 Water inlet: set up the piping mounted flush with the casing with a 1/2" female thread. Hook up only cold water (max 25°C). Inlet water pressure must not exceed 8 bar (800 kPa). For best operation, water pressure should be max. 1.5 ÷ 2 bar (150 ÷ 200kPa). CAUTION: if the water is medium hard or hard, it is recommended to install a softener upstream of the generator. Otherwise, the generator boiler may be subject to significant wear and tear.
- 2 Water outlet: set up 1/2" female, heat resistant (up to 70°C) siphoned piping mounted flush with the casing. The outlet pipe must ensure correct water outflow, therefore, a downward slope of at least 5° is recommended.
- 3 Sheath Ø 25 for the electric power supply: set up a power cable of suitable cross-section.
- 4 Sheath Ø 25 for connecting the options.

CERTIFIED
PRODUCT



EASYSTEAM SMART

Technical card download 

EASYSTEAM SMART 30

Space volume (cubic metres): 0 - 3,5 in insulated space with the use of 3 cm thick insulation panels
Power: 3,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 4,4 Kg/h max

Counterbox	CH 90 00 0198	€ 430,00
Easystem Smart 30	HA CM ES 0013	€ 6.085,00
Total Price		€ 6.515,00

EASYSTEAM SMART 45

Space volume (cubic metres): 3,5 - 4,5 in insulated space with the use of 3 cm thick insulation panels
Power: 4,5 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 6,6 Kg/h max

Counterbox	CH 90 00 0198	€ 430,00
Easystem Smart 45	HA CM ES 0014	€ 6.085,00
Total Price		€ 6.515,00

DIMENSIONS
cm 25 x 3,7 x 57 h

COUNTERBOX DIMENSIONS
cm 42 x 11 x 64 h
with Schlüter waterproofing mat

MATERIALS
Curved silk-screen printed glass panel
Painted aluminium RAL 9003

BUILT IN STEAM GENERATOR
Features:
> automatic boiler cleaning system
> water flow rate control system
> automatic water drainage system
> Automatic energy-saving function

TOUCH-SCREEN CONTROL PANEL
with backlit icons and temperature gauge


POWER STEAM FUNCTION
Steam diffusion and forced ventilation heating system

CONTAINERS FOR ESSENTIAL OILS

ECC 5.0 - Effe Comfort Control
This system is incorporated into steam generator so that the Turkish bath can be remotely controlled. Just download the app "MY EFFE" to your Tablet or Smartphone.
 [More information](#)

Options


NOTE: EASYSTEAM SMART CAN POWER ONLY 1 OPTIONAL CEILING LIGHT FITTING OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT OPTIONS

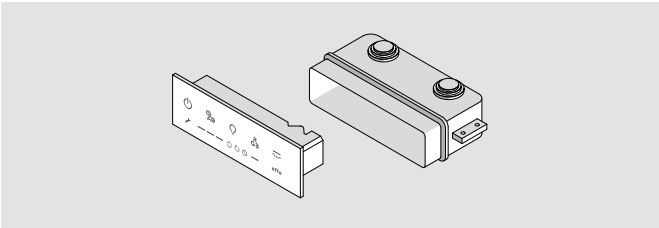

Remote touch-screen control panel

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

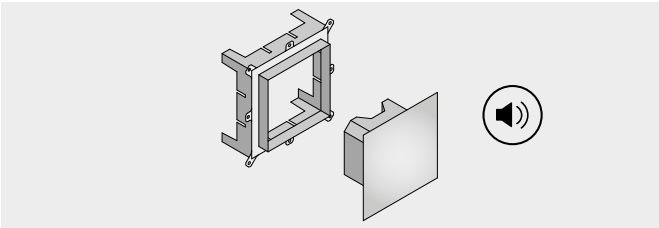

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm. 3.000 K
 [More information](#)


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

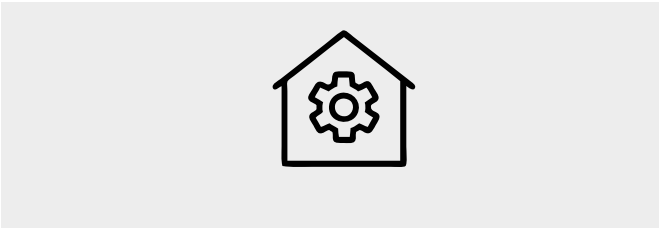

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).


Home-Automation Device	ME 99 00 0421	€ 775,00
------------------------	---------------	----------

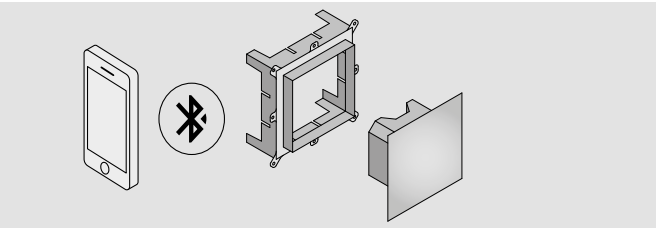

ESS - Effe Sound System Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
 [More information](#)

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

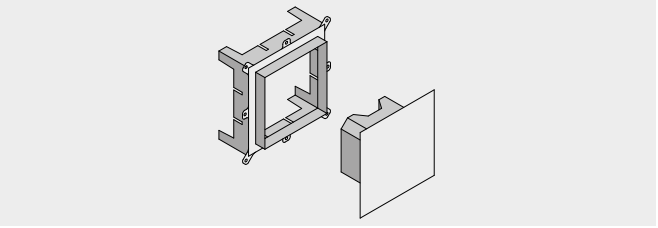

White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat. 3.000 K
IP X5 class

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

EASYSTEAM SMART

Technical card download 

EASYSTEAM SMART 60

Space volume (cubic metres): 4,5 - 6,2 in insulated space with the use of 3 cm thick insulation panels
Power: 6,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 8,9 Kg/h max

Easystem Smart 60	HA CM ES 0018	€ 6.850,00
-------------------	---------------	------------

DIMENSIONS
cm 25 x 3,7 x 57 h

MATERIALS
Curved silk-screen printed glass panel
Painted aluminium RAL 9003

BUILT IN STEAM GENERATOR
Features:
> automatic boiler cleaning system
> water flow rate control system
> automatic water drainage system
> Automatic energy-saving function

TOUCH-SCREEN CONTROL PANEL
with backlit icons and temperature gauge


POWER STEAM FUNCTION
Steam diffusion and forced ventilation heating system

CONTAINERS FOR ESSENTIAL OILS

ECC 5.0 - Effe Comfort Control
This system is incorporated into steam generator so that the Turkish bath can be remotely controlled. Just download the app "MY EFFE" to your Tablet or Smartphone.
 [More information](#)

Options


NOTE: EASYSTEAM SMART CAN POWER ONLY 1 OPTIONAL CEILING LIGHT FITTING OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT OPTIONS

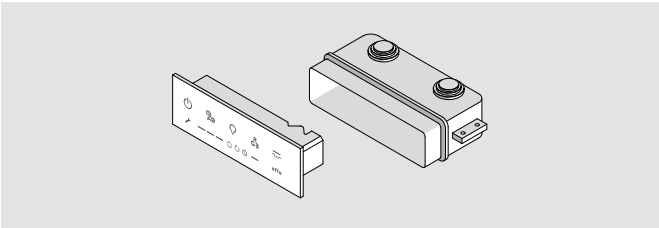

Remote touch-screen control panel


Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat

Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

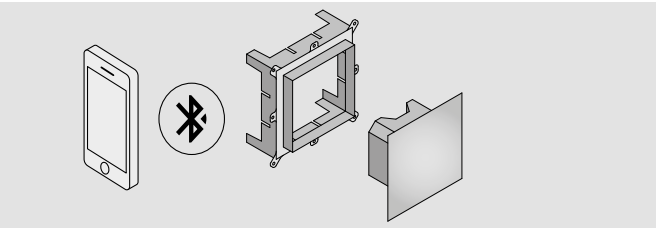


ESS - Effe Sound System
Kit with colour therapy, white light and Bluetooth speakers
Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
 [More information](#)

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

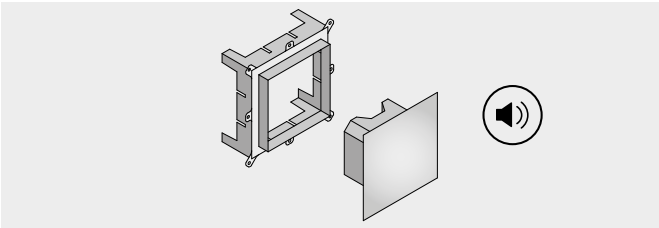


Ceiling light fixture with colour therapy, white light and passive loudspeakers
Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat. 3.000 K
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
 [More information](#)

Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

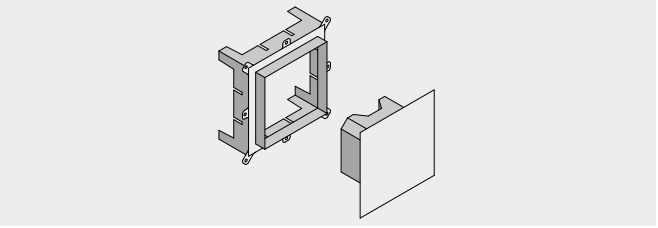

White light fixture
Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat. 3.000 K
IP X5 class

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

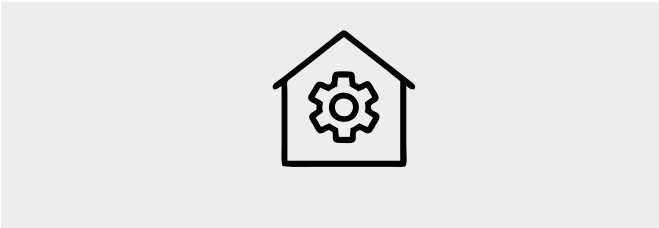

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).

Home-Automation Device	ME 99 00 0421	€ 775,00
------------------------	---------------	----------

Inside Glass • Inside Camouflage




18

Inside Glass		
Inside Camouflage		
	m³	kW
30	0 - 3,5	3
45	3,5 - 4,5	4,5
60	4,5 - 6,2	6

Technical information

More information: www.effe.it

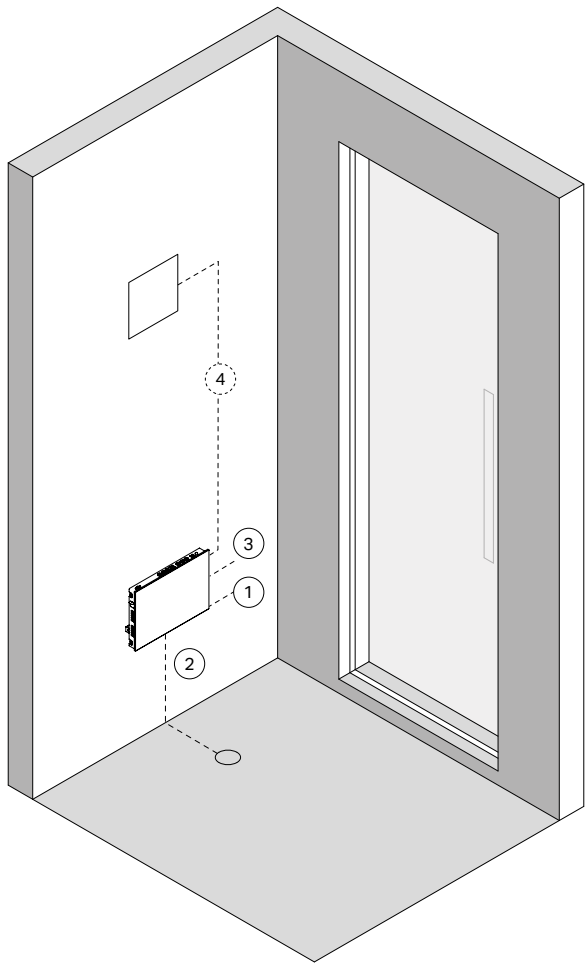

- 1
Water inlet
- 2
Water outlet
- 3
Electric power supply


All work must be carried out by qualified personnel or by one of our Service Centres, depending on local and international regulations – CEI 64.8 (IEC 364 – 1). Make sure the electric and plumbing connections for the systems have been correctly set up in compliance with local and international standards (water line with closing gate valve, outlet siphon, power line with suitable magnetothermic + residual-current circuit breaker, etc.) according to the related technical specifications.
Connect all piping in such a way that it may be disconnected (in the event the device needs to be removed for maintenance). Use brass or copper piping only. Do not use galvanised or black PVC piping.
Prepare a space that is 400 mm x 540 mm and at least 80 mm deep to house the Inside device.

- 1
Water inlet: set up the piping mounted flush with the casing with a 1/2" female thread. Hook up only cold water (max 25°C). Inlet water pressure must not exceed 8 bar (800 kPa). For best operation, water pressure should be max. 1.5 ÷ 2 bar (150 ÷ 200kPa). CAUTION: if the water is medium hard or hard, it is recommended to install a softener upstream of the generator. Otherwise, the generator boiler may be subject to significant wear and tear.
- 2
Water outlet: set up 1/2" female, heat resistant (up to 70°C) siphoned piping mounted flush with the casing. The outlet pipe must ensure correct water outflow, therefore, a downward slope of at least 5° is recommended.
- 3
Sheath Ø 25 for the electric power supply: set up a power cable of suitable cross-section.
- 4
Sheath Ø 25 for connecting the options.

CERTIFIED
PRODUCT



INSIDE

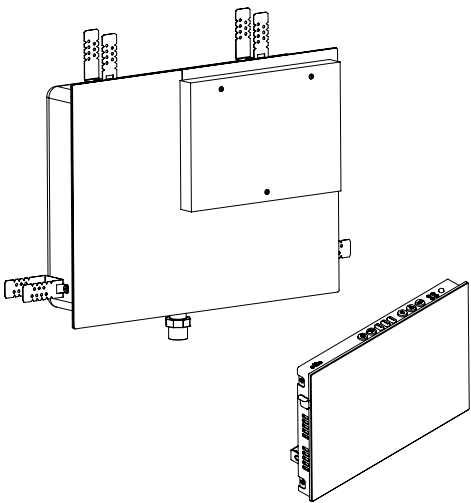

DIMENSIONS
cm 36 x 8,45 x 25 h

COUNTERBOX DIMENSIONS
cm 56 x 11,2 x 38 h
with waterproofing mat

- MATERIALS**
- > Curved silk-screen printed glass panel (GLASS)
 - > Stainless steel with satin finish, max thickness of cladding, including adhesive, 13 mm (CAMOUFLAGE)

BUILT IN STEAM GENERATOR
Features:

- > automatic boiler cleaning system
- > water flow rate control system
- > automatic water drainage system
- > Automatic energy-saving function

INTEGRATED CONTROL PANEL
With backlit icons and temperature gauge

POWER STEAM FUNCTION
Steam diffusion and forced ventilation heating system

CONTAINER FOR ESSENTIAL OILS

BUILT-IN LED LIGHTING
Inside has RGB LED lighting for a complete colour therapy experience.

VIRTUAL DOOR-OPEN SENSOR
The generator automatically interrupts steam distribution when the door is left open for a long time.

DIY DESCALING
Descaling the boiler is the most frequent maintenance operation required by a steam generator. Inside is the first EFFE generator which can easily be descaled by the user. The generator signals when the boiler needs descaling and the user must then follow the instructions in the operating and installation manual. Descaling will prolong the life of the generator, with no external assistance required.

INSIDE 30

Technical card download 

Space volume (cubic metres): 0 - 3,5 insulated space with the use of 3 cm thick insulation panels.
Power: 3,0 kW max - 2220-240Vac 1N 50-60Hz - 380-415Vac 3N 50-60Hz. Steam generation: 4,4 Kg/h max.

Inside GLASS	HA IN 01 0001	€ 5.125,00
Inside CAMOUFLAGE	HA IN 02 0001	€ 4.880,00

INSIDE 45

Space volume (cubic metres): 3,5 - 4,5 insulated space with the use of 3 cm thick insulation panels.
Power: 4,5 kW max - 220-240Vac 1N 50-60Hz - 380-415Vac 3N 50-60Hz. Steam generation: 6,6 Kg/h max.

Inside GLASS	HA IN 01 0002	€ 5.125,00
Inside CAMOUFLAGE	HA IN 02 0002	€ 4.880,00

INSIDE 60

Technical card download 

Space volume (cubic metres): 4,5 - 6,2 in insulated space with the use of 3 cm thick insulation panels
Power: 6,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 8,9 Kg/h max

Inside GLASS	HA IN 01 0007	€ 5.675,00
Inside CAMOUFLAGE	HA IN 02 0007	€ 5.450,00

ADDITIONAL CONTACT:
the product has an additional contact to operate eventual extractor fans.


Options

NOTE: INSIDE CAN POWER ONLY 1 OPTIONAL ESS - EFFE SOUND SYSTEM CEILING LIGHT FITTING.



ECC 5.0 - Effe Comfort Control
The product can be remotely controlled by downloading the "MY EFFE" app onto a smartphone or tablet.
 More information

ECC - Effe Comfort Control	ME 21 00 0116	€ 750,00
----------------------------	---------------	----------

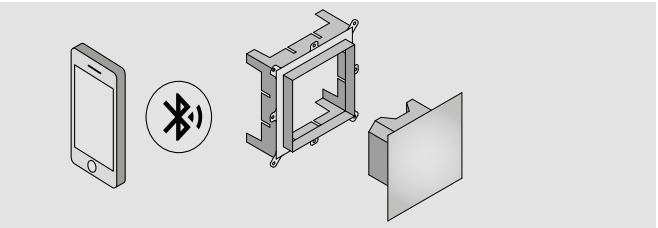

ESS - Effe Sound System
Kit with colour therapy, white light and Bluetooth speakers
Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm. .
 More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

Nuvola Smart



22 **Nuvola Smart 30**
0 - 3,5 m³ | 3 kW

24 **Nuvola Smart 45**
3,5 - 4,5 m³ | 4,5 kW

26 **Nuvola Smart 55**
4,5 - 5,5 m³ | 5,5 kW

28 **Nuvola Smart 70**
5,5 - 7,2 m³ | 7 kW

30 **Nuvola Smart 90**
7,2 - 9,2 m³ | 9 kW

32 **Nuvola Smart 110**
9,2 - 12 m³ | 11 kW

34 **Nuvola Smart 140**
12 - 15 m³ | 14 kW


36 **Nuvola Smart 180**
15 - 25 m³ | 18 kW

38 **Nuvola Smart 250**
25 - 35 m³ | 25 kW

40 **Nuvola Smart 360**
35 - 50 m³ | 36 kW

Technical information

More information: www.effe.it

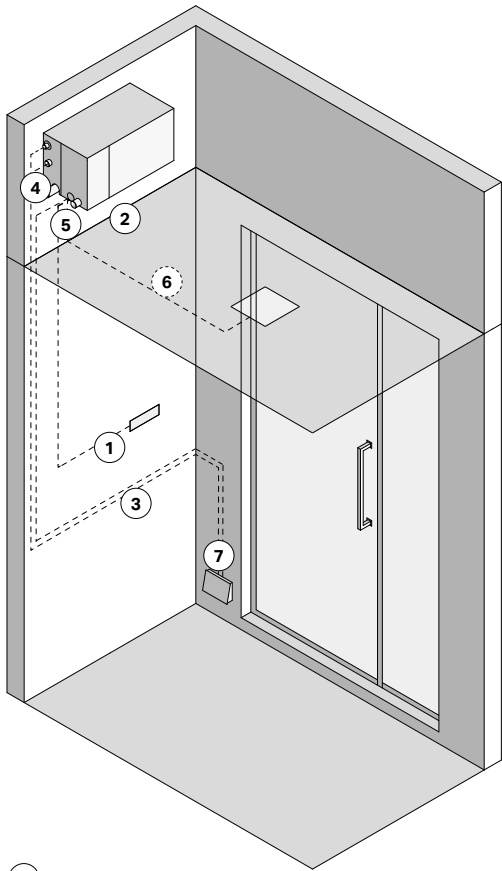

1 **Connection between Nuvola Smart and the control panel**

2 **Electric power supply**

3 **Steam piping**

4 **Water inlet**

5 **Water outlet**

6 **Options connection**

7 **PSF - Power Steam Function**

All work must be carried out by qualified personnel or by one of our Service Centres, based on local and international standards – CEI 64.8 (IEC 364 – 1). Make sure that the electric and plumbing connections for the steam generator have been correctly set up (water line with closing gate valve, outlet siphon, power line with suitable magnetothermal residual current device, etc.) according to the related technical specifications. Connect all piping in such a way that it may be disconnected (in the event of removal of the generator for maintenance). Use brass or copper piping only. Do not use galvanised or black PVC piping.

1 Connection between Nuvola Smart and the control panel: Set up an electric sheath (Ø 25 mm) (max 5 m) to connect the steam generator to the control panel. The control panel will be placed inside the Turkish bath, at a height of about 1600 mm from the floor.

2 Electric power supply: set up a power cable of suitable cross-section.

3 A - Steam piping (max 5 m): Lay an insulated Ø 22mm copper pipe without creating siphons.
B - Electric power supply steam diffuser: Prepare a Ø 25mm electric sheath (max 5m) for the steam diffuser connection.

4 Water inlet: Set up the piping mounted flush with the wall with a ½" female thread.
Hook up only cold water (max 25°C). The incoming water pressure must be at least 0.2bar and not above 10bar. For best operation, water pressure should be max. 1.5 ÷ 2 bar (150 ÷ 200 kPa).

CAUTION: if the water is medium hard or hard, it is recommended to install a softener upstream of the generator. Otherwise, the generator boiler may be subject to significant wear and tear.

5 Water outlet: Lay a pre-siphoned heat resistant (up to 70 °C) piping with a diameter of 32mm. The entrance to the pipe must be below the water outlet of the steam generator. To guarantee correct water flow, we recommend the piping must have a downward slope of at least 5°.


6 Sheath Ø 25 for connecting the options.

7 PSF - Power Steam Function: Innovative air ventilation system which reduces temperature stratification

CERTIFIED
PRODUCT



NUVOLA SMART 30

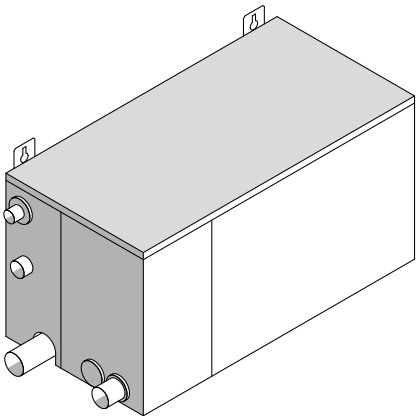

STEAM GENERATOR
Dimensions: cm 52 x 26 x 27 h
Features:

- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
- > SWF Smart Water Filling - Optimised management of boiler filling
- > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
- > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
- > ODS Open Door Sensor - Open Door Sensor
- > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
- > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL
Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h with Schlüter waterproofing mat
Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE
Mounting box: cm 18 x 10 x 15,2 h with Schlüter waterproofing mat
Diffuser: cm 18,2 x 4,5 x 12,3 h
Features:

- > GLASS: glass front
- > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
- > Adjustable flaps to control the outgoing steam direction
- > Cubicle air-recirculation system built into the water-resistant fan
- > Essential oils container
- > Steam output led light
- > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER
Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR
The generator automatically interrupts steam distribution when the door is left open for a long time.

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C

A

NUVOLA SMART 30

Space volume (cubic metres): 2,5 - 3,5 in insulated space with the use of 3 cm thick insulation panels
Power: 3 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 4,4 Kg/h max

Nuvola Smart 30	HA 50 50 0082	€ 3.610,00
-----------------	---------------	------------

B

CONTROL PANELS

Choose the counterbox and the control panel model

Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C

STEAM DIFFUSER

Choose the counterbox and steam diffuser model


SMART GLASS	SMART CAMOUFLAGE	
(glass)	(to be covered)	
Steam diffuser counterbox	CH 90 00 0187	€ 130,00
Glass	CH 75 00 0017	€ 390,00
Camouflage	CH 75 00 0042	€ 400,00

TRADITIONAL

Chrome	CH 75 00 0001	€ 95,00
Black matt PVD	CH 75 00 0038	€ 110,00
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00


Options

NOTE: NUVOLA SMART 30 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

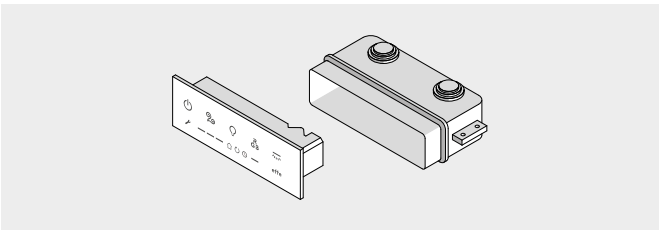

Additional remote touch-screen control panel
Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h with Schlüter waterproofing mat

Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

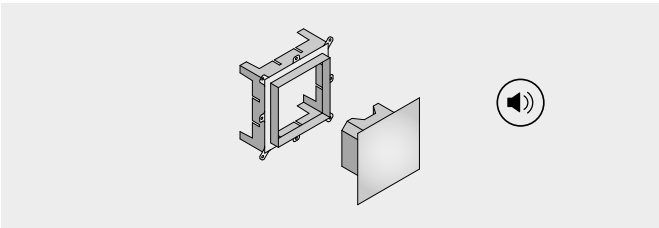


Ceiling light fixture with colour therapy, white light and passive loudspeakers
Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K
[📶 More information](#)

Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00




Home-Automation Device
Enables the product to be connected to and integrated with home-automation systems (power pack included).

Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

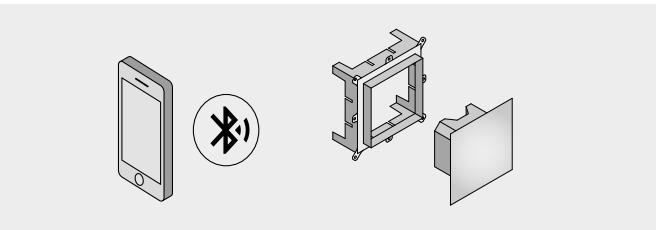

ESS - Effe Sound System
Kit with colour therapy, white light and Bluetooth speakers
Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
[📶 More information](#)


Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

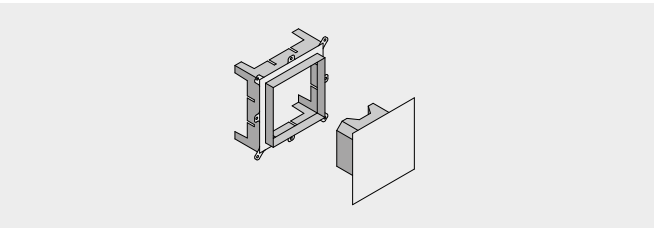

White light fixture
Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 45

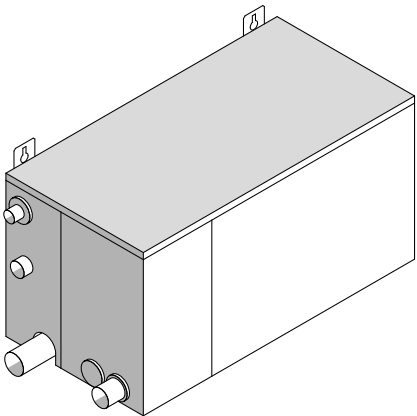

STEAM GENERATOR

- Dimensions: cm 52 x 26 x 27 h
Features:
- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
 - > SWF Smart Water Filling - Optimised management of boiler filling
 - > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
 - > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
 - > ODS Open Door Sensor - Open Door Sensor
 - > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
 - > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat
Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE

- Mounting box: cm 18 x 10 x 15,2 h
with Schlüter waterproofing mat
Diffuser: cm 18,2 x 4,5 x 12,3 h
Features:
- > GLASS: glass front
 - > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
 - > Adjustable flaps to control the outgoing steam direction
 - > Cubicle air-recirculation system built into the water-resistant fan
 - > Essential oils container
 - > Steam output led light
 - > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C



A NUVOLA SMART 45

Space volume (cubic metres): 3,5 - 4,5 in insulated space with the use of 3 cm thick insulation panels
Power: 4,5 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 6,6 Kg/h max

Nuvola Smart 45	HA 50 50 0083	€ 3.610,00
-----------------	---------------	------------


B CONTROL PANELS

Choose the counterbox and the control panel model

		
Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER


Choose the counterbox and steam diffuser model

		
SMART GLASS (glass)	SMART CAMOUFLAGE (to be covered)	
Steam diffuser counterbox	CH 90 00 0187	€ 130,00
Glass 1 pc	CH 75 00 0017	€ 390,00
Camouflage 1 pc	CH 75 00 0042	€ 400,00

		
TRADITIONAL		
Chrome 1 pc	CH 75 00 0001	€ 95,00
Black matt PVD 1 pc	CH 75 00 0038	€ 110,00
Matt Gun Metal PVD 1 pc	CH 75 00 0045	€ 150,00

Options


NOTE: NUVOLA SMART 45 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

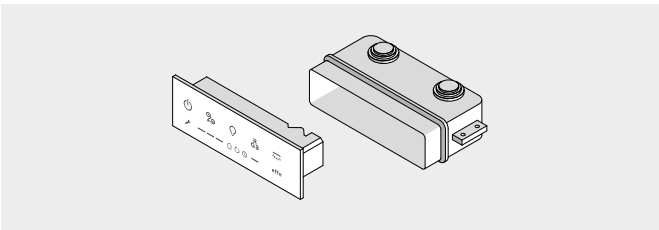

Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

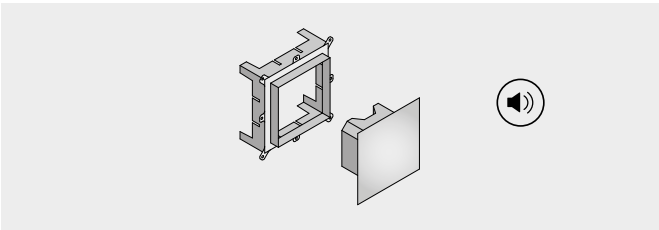

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K
More information


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

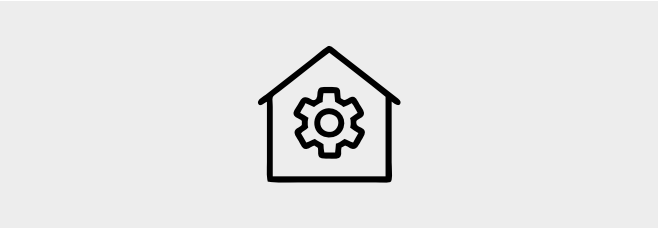

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).


Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

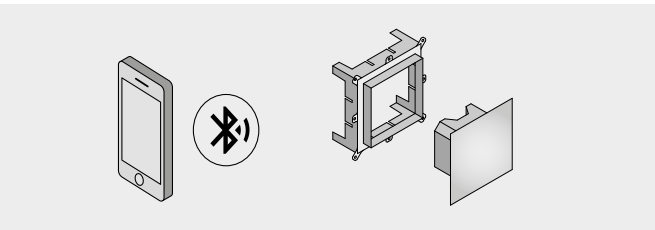

ESS - Effe Sound System Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

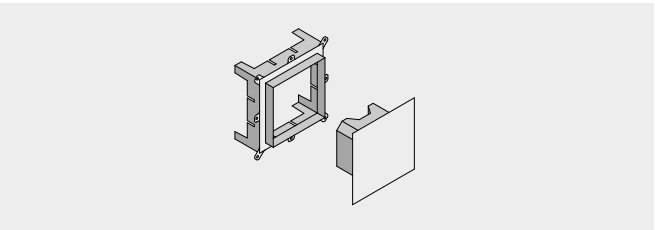


White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 55

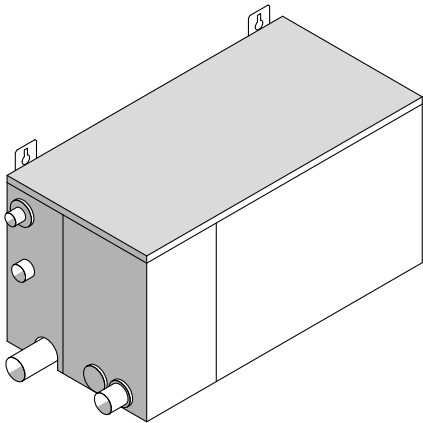

STEAM GENERATOR

Dimensions: cm 52 x 26 x 27 h

Features:

- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
- > SWF Smart Water Filling - Optimised management of boiler filling
- > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
- > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
- > ODS Open Door Sensor - Open Door Sensor
- > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
- > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6

Mounting box dimensions: cm 19 x 8 x 4,3 h

with Schlüter waterproofing mat

Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE

Mounting box: cm 18 x 10 x 15,2 h

with Schlüter waterproofing mat

Diffuser: cm 18,2 x 4,5 x 12,3 h

Features:

- > GLASS: glass front
- > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
- > Adjustable flaps to control the outgoing steam direction
- > Cubicle air-recirculation system built into the water-resistant fan
- > Essential oils container
- > Steam output led light
- > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER (2 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C



A NUVOLA SMART 55

Space volume (cubic metres): 4,5 - 5,5 in insulated space with the use of 3 cm thick insulation panels
Power: 5,5 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 8,1 Kg/h max

Nuvola Smart 55	HA 50 50 0112	€ 4.090,00
-----------------	---------------	------------


B CONTROL PANELS

Choose the counterbox and the control panel model

		
Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model

		
SMART GLASS (glass)	SMART CAMOUFLAGE (to be covered)	
Steam diffuser counterbox	CH 90 00 0187	€ 130,00
Glass	CH 75 00 0017	€ 390,00
Camouflage	CH 75 00 0042	€ 400,00


TRADITIONAL

IT IS NECESSARY TO ORDER 2 PIECES

Chrome	CH 75 00 0001	€ 95,00 x 2
Black matt PVD	CH 75 00 0038	€ 110,00 x 2
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 2

Options

NOTE: NUVOLA SMART 55 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

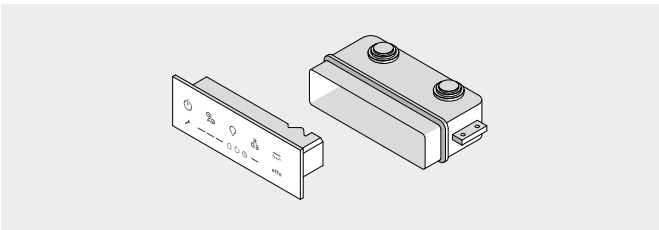


Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6

Mounting box dimensions: cm 19 x 8 x 4,3 h

with Schlüter waterproofing mat

Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

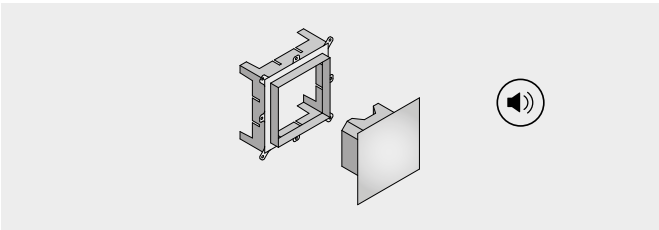

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2


Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat

IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K

[📶 More information](#)


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

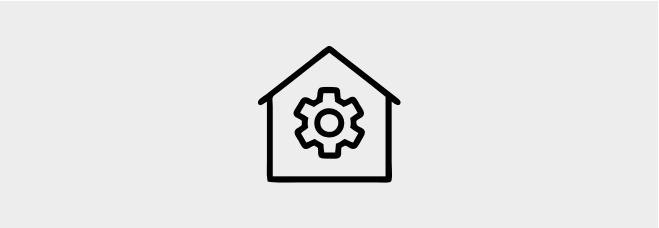

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).

Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

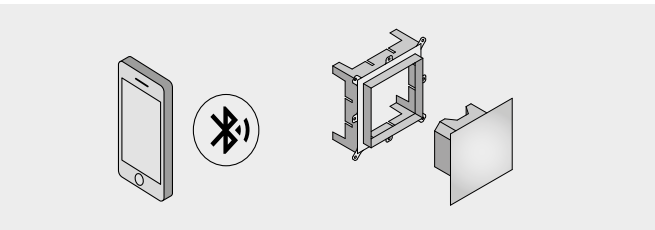

ESS - Effe Sound System

Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2


Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat

IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm

[📶 More information](#)

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

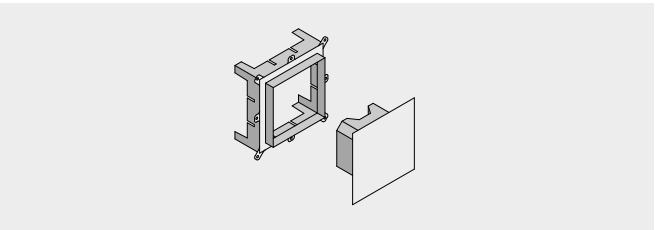

White light fixture


Light fixture dimensions: cm 20 x 20 x 2

Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 70

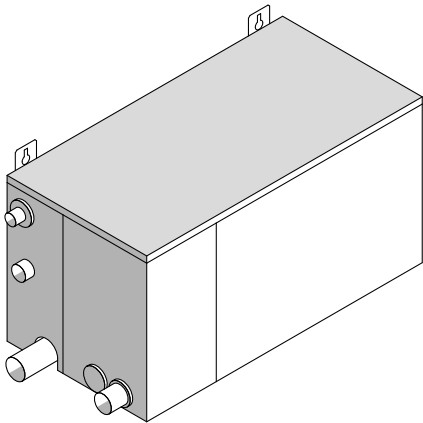

STEAM GENERATOR

Dimensions: cm 52 x 26 x 27 h

Features:

- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
- > SWF Smart Water Filling - Optimised management of boiler filling
- > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
- > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
- > ODS Open Door Sensor - Open Door Sensor
- > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
- > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6

Mounting box dimensions: cm 19 x 8 x 4,3 h

with Schlüter waterproofing mat

Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE

Mounting box: cm 18 x 10 x 15,2 h

with Schlüter waterproofing mat

Diffuser: cm 18,2 x 4,5 x 12,3 h

Features:

- > GLASS: glass front
- > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
- > Adjustable flaps to control the outgoing steam direction
- > Cubicle air-recirculation system built into the water-resistant fan
- > Essential oils container
- > Steam output led light
- > Additional temperature probe inside the diffuse

TRADITIONAL STEAM DIFFUSER (2 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C


A NUVOLA SMART 70

Space volume (cubic metres): 5,5 - 7,2 in insulated space with the use of 3 cm thick insulation panels
Power: 7,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 10,2 Kg/h max

Nuvola Smart 70	HA 50 50 0084	€ 4.090,00
-----------------	---------------	------------

B CONTROL PANELS

Choose the counterbox and the control panel model



Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model




SMART GLASS (glass)	SMART CAMOUFLAGE (to be covered)	
Steam diffuser counterbox 1 pc	CH 90 00 0187	€ 130,00
Glass 1 pc	CH 75 00 0017	€ 390,00
Camouflage 1 pc	CH 75 00 0042	€ 400,00



TRADITIONAL		
IT IS NECESSARY TO ORDER 2 PIECES		
Chrome	CH 75 00 0001	€ 95,00 x 2
Black matt PVD	CH 75 00 0038	€ 110,00 x 2
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 2

Options

NOTE: NUVOLA SMART 70 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

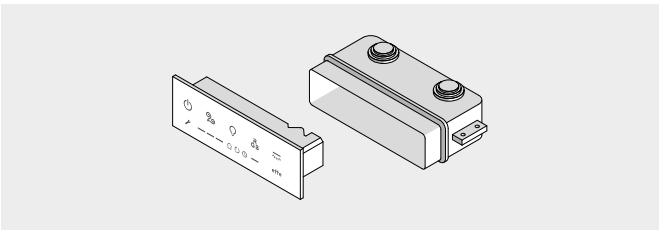


Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6

Mounting box dimensions: cm 19 x 8 x 4,3 h

with Schlüter waterproofing mat

Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

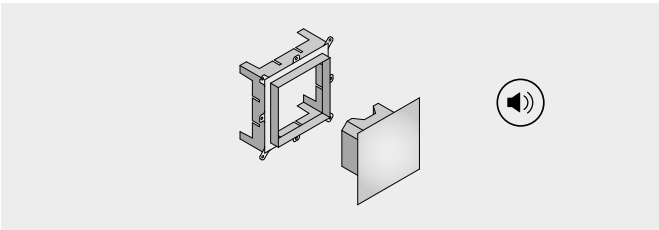

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2


Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat

IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K

[📶 More information](#)


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

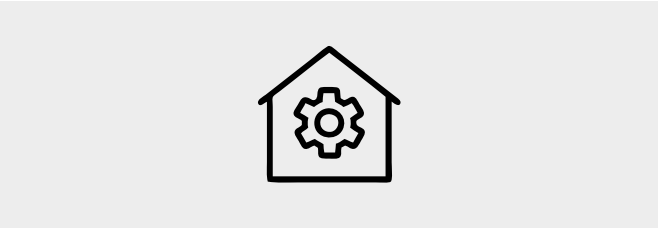

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).

Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

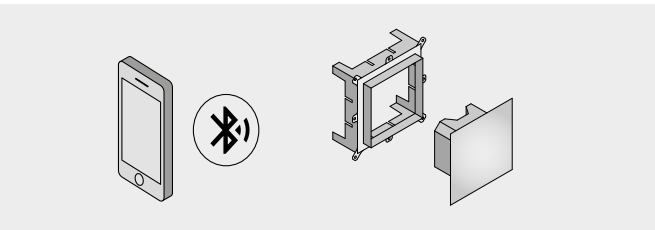

ESS - Effe Sound System Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2


Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat

IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm.

[📶 More information](#)

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

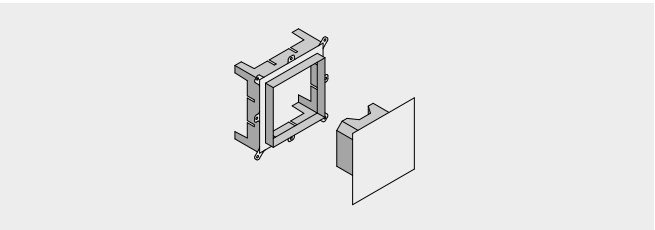

White light fixture


Light fixture dimensions: cm 20 x 20 x 2

Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 90

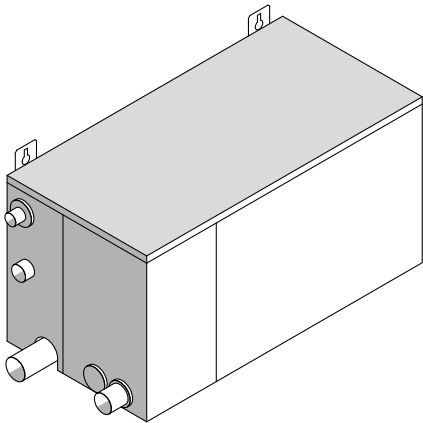

STEAM GENERATOR

- Dimensions: cm 52 x 26 x 27 h
Features:
- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
 - > SWF Smart Water Filling - Optimised management of boiler filling
 - > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
 - > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
 - > ODS Open Door Sensor - Open Door Sensor
 - > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
 - > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat
Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE

- Mounting box: cm 18 x 10 x 15,2 h
with Schlüter waterproofing mat
Diffuser: cm 18,2 x 4,5 x 12,3 h
Features:
- > GLASS: glass front
 - > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
 - > Adjustable flaps to control the outgoing steam direction
 - > Cubicle air-recirculation system built into the water-resistant fan
 - > Essential oils container
 - > Steam output led light
 - > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER (2 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C



A NUVOLA SMART 90

Space volume (cubic metres): 7,2 - 9,2 in insulated space with the use of 3 cm thick insulation panels
Power: 9,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 13,1 Kg/h max

Nuvola Smart 90	HA 50 50 0085	€ 4.090,00
-----------------	---------------	------------


B CONTROL PANELS

Choose the counterbox and the control panel model

		
Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model

		
SMART GLASS (glass)	SMART CAMOUFLAGE (to be covered)	
Steam diffuser counterbox	CH 90 00 0187	€ 130,00
Glass	CH 75 00 0017	€ 390,00
Camouflage	CH 75 00 0042	€ 400,00


TRADITIONAL

IT IS NECESSARY TO ORDER 2 PIECES

Chrome	CH 75 00 0001	€ 95,00 x 2
Black matt PVD	CH 75 00 0038	€ 110,00 x 2
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 2

Options


NOTE: NUVOLA SMART 90 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

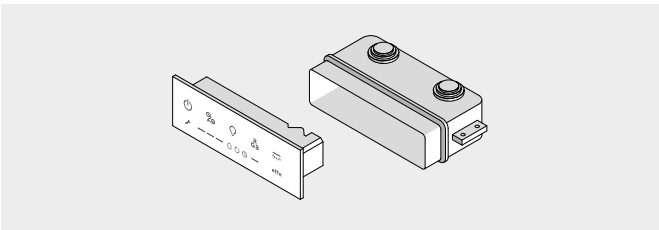

Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

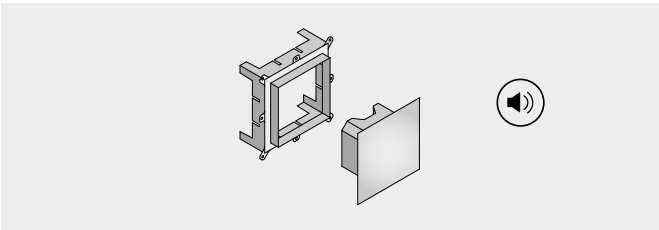

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K
 More information


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

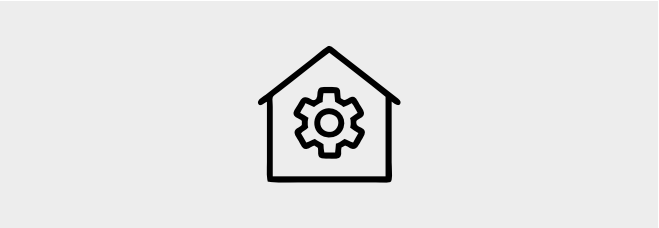

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).


Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

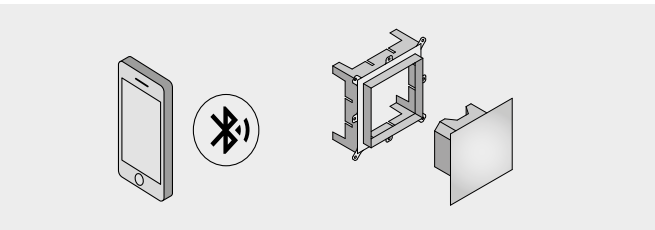

ESS - Effe Sound System Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
 More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

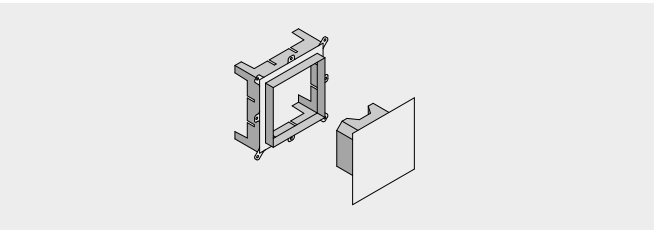


White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 110

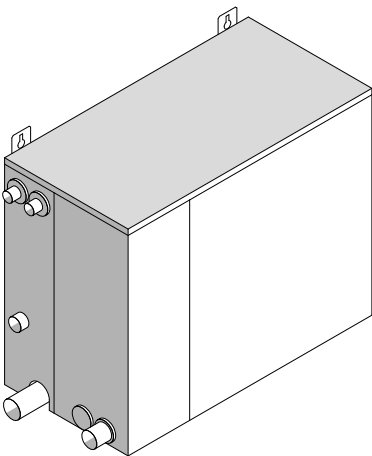

STEAM GENERATOR

- Dimensions: cm 52 x 26 x 45 h
Features:
- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
 - > SWF Smart Water Filling - Optimised management of boiler filling
 - > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
 - > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
 - > ODS Open Door Sensor - Open Door Sensor
 - > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
 - > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat
Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE (2 pcs.)

- Mounting box: cm 18 x 10 x 15,2 h
with Schlüter waterproofing mat
Diffuser: cm 18,2 x 4,5 x 12,3 h
Features:
- > GLASS: glass front
 - > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
 - > Adjustable flaps to control the outgoing steam direction
 - > Cubicle air-recirculation system built into the water-resistant fan
 - > Essential oils container
 - > Steam output led light
 - > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER (4 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

Technical card download 

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C



A NUVOLA SMART 110

Space volume (cubic metres): 9,2 - 12 in insulated space with the use of 3 cm thick insulation panels
Power: 11,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 16,2 Kg/h max

Nuvola Smart 110	HA 50 50 0086	€ 5.600,00
------------------	---------------	------------


B CONTROL PANELS

Choose the counterbox and the control panel model

		
Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model


		
SMART GLASS	SMART CAMOUFLAGE	
(glass)	(to be covered)	
IT IS NECESSARY TO ORDER 2 PIECES		
Steam diffuser counterbox	CH 90 00 0187	€ 130,00 x 2
Glass	CH 75 00 0017	€ 390,00 x 2
Camouflage	CH 75 00 0042	€ 400,00 x 2



TRADITIONAL		
IT IS NECESSARY TO ORDER 4 PIECES		
Chrome	CH 75 00 0001	€ 95,00 x 4
Black matt PVD	CH 75 00 0038	€ 110,00 x 4
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 4

Options


NOTE: NUVOLA SMART 110 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

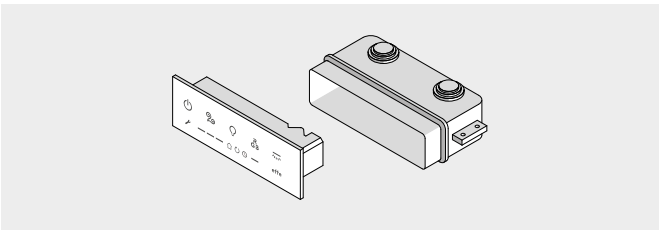

Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat

Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

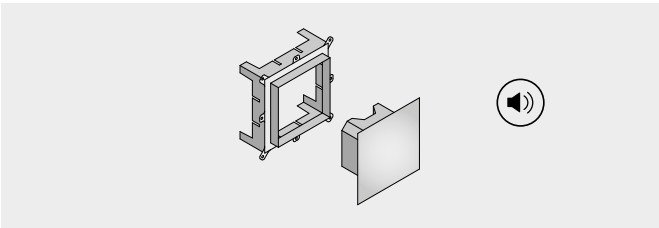

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K
 More information


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00



Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).


Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

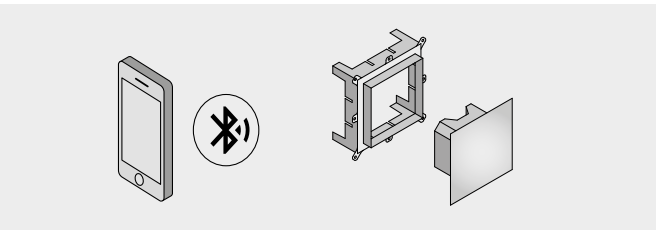

ESS - Effe Sound System Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
 More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

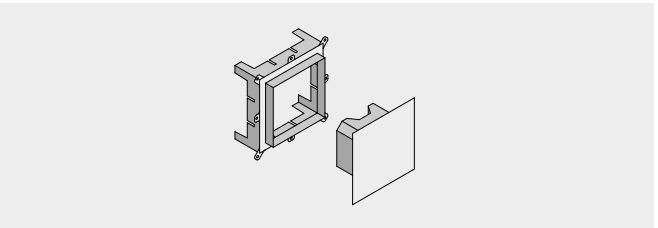


White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 140

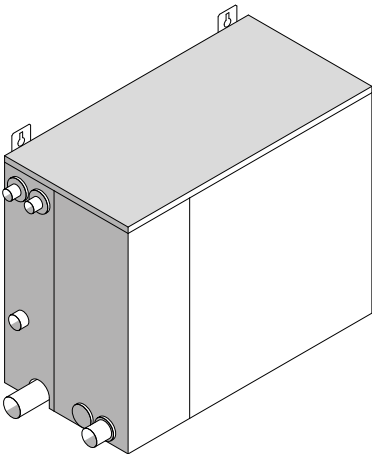

STEAM GENERATOR

- Dimensions: cm 52 x 26 x 45 h
Features:
- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
 - > SWF Smart Water Filling - Optimised management of boiler filling
 - > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
 - > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
 - > ODS Open Door Sensor - Open Door Sensor
 - > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
 - > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat
Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE (2 pcs.)

- Mounting box: cm 18 x 10 x 15,2 h
with Schlüter waterproofing mat
Diffuser: cm 18,2 x 4,5 x 12,3 h
Features:
- > GLASS: glass front
 - > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
 - > Adjustable flaps to control the outgoing steam direction
 - > Cubicle air-recirculation system built into the water-resistant fan
 - > Essential oils container
 - > Steam output led light
 - > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER (4 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

Technical card download 

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C



A NUVOLA SMART 140

Space volume (cubic metres): 12 - 15 in insulated space with the use of 3 cm thick insulation panels
Power: 14,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 20,7 Kg/h max

Nuvola Smart 140	HA 50 50 0087	€ 5.600,00
------------------	---------------	------------


B CONTROL PANELS

Choose the counterbox and the control panel model

		
Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model




SMART GLASS

(glass)

SMART CAMOUFLAGE

(to be covered)

IT IS NECESSARY TO ORDER 2 PIECES


Steam diffuser counterbox	CH 90 00 0187	€ 130,00 x 2
Glass	CH 75 00 0017	€ 390,00 x 2
Camouflage	CH 75 00 0042	€ 400,00 x 2



TRADITIONAL		
IT IS NECESSARY TO ORDER 4 PIECES		
Chrome	CH 75 00 0001	€ 95,00 x 4
Black matt PVD	CH 75 00 0038	€ 110,00 x 4
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 4

Options


NOTE: NUVOLA SMART 140 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

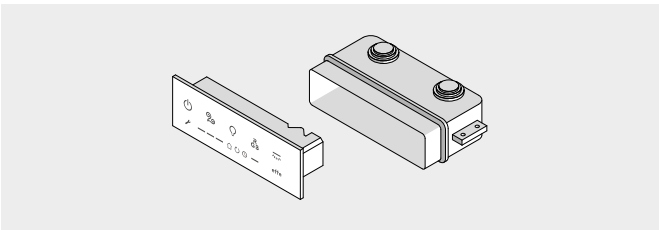

Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

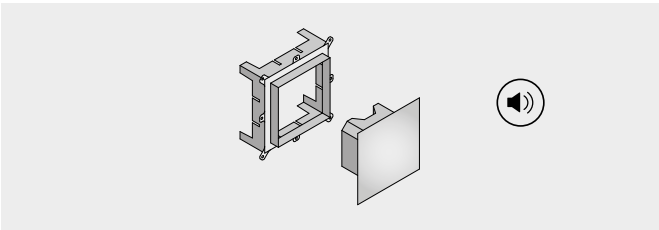

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K
 More information


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

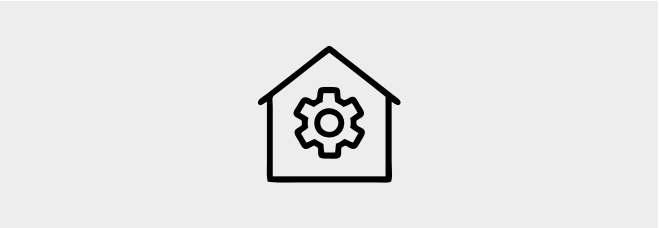

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).


Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

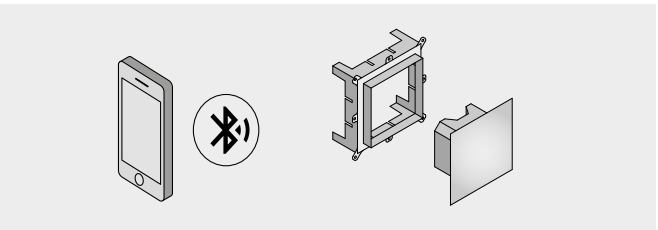

ESS - Effe Sound System Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
 More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

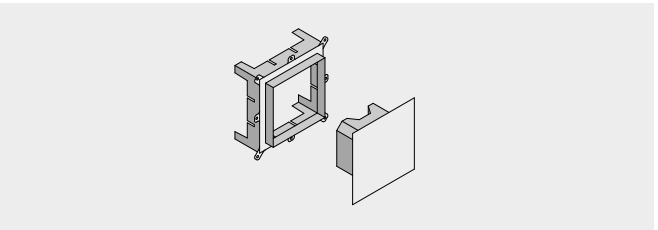


White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 180

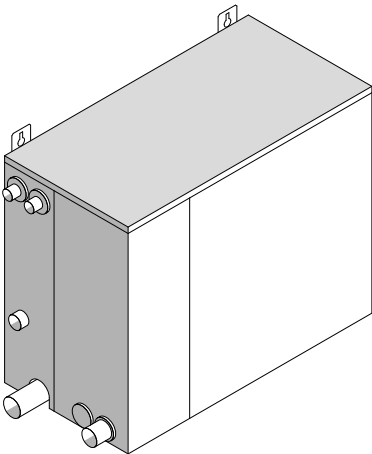

STEAM GENERATOR

- Dimensions: cm 52 x 26 x 45 h
Features:
- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
 - > SWF Smart Water Filling - Optimised management of boiler filling
 - > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
 - > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
 - > ODS Open Door Sensor - Open Door Sensor
 - > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
 - > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat
Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE (2 pcs.)

- Mounting box: cm 18 x 10 x 15,2 h
with Schlüter waterproofing mat
Diffuser: cm 18,2 x 4,5 x 12,3 h
Features:
- > GLASS: glass front
 - > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
 - > Adjustable flaps to control the outgoing steam direction
 - > Cubicle air-recirculation system built into the water-resistant fan
 - > Essential oils container
 - > Steam output led light
 - > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER (4 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C



A NUVOLA SMART 180

Space volume (cubic metres): 15 - 25 in insulated space with the use of 3 cm thick insulation panels
Power: 18,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 26,2 Kg/h max

Nuvola Smart 180	HA 50 50 0088	€ 5.600,00
------------------	---------------	------------


B CONTROL PANELS

Choose the counterbox and the control panel model

		
Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model



SMART GLASS

(glass)



SMART CAMOUFLAGE

(to be covered)

IT IS NECESSARY TO ORDER 2 PIECES


Steam diffuser counterbox	CH 90 00 0187	€ 130,00 x 2
Glass	CH 75 00 0017	€ 390,00 x 2
Camouflage	CH 75 00 0042	€ 400,00 x 2



TRADITIONAL		
IT IS NECESSARY TO ORDER 4 PIECES		
Chrome	CH 75 00 0001	€ 95,00 x 4
Black matt PVD	CH 75 00 0038	€ 110,00 x 4
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 4

Options


NOTE: NUVOLA SMART 180 CAN POWER UP TO 2 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

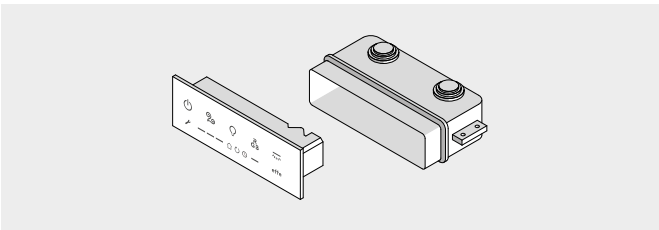

Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

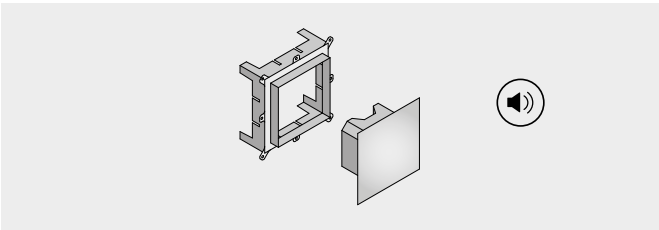

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K
More information


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

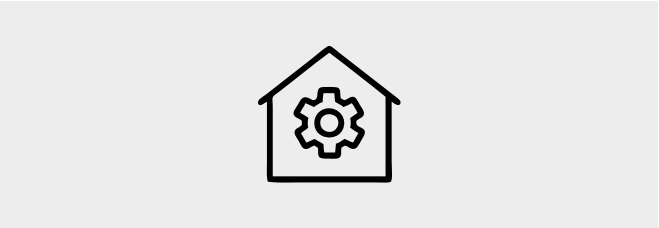

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).


Home-Automation Device.	ME 99 00 0421	€ 775,00
-------------------------	---------------	----------

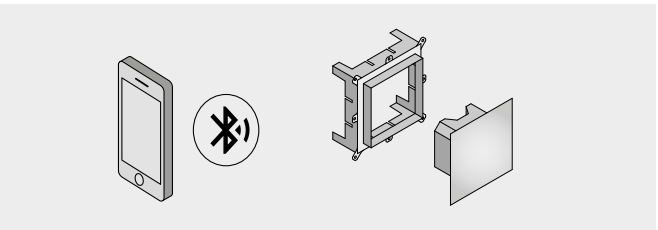

ESS - Effe Sound System Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

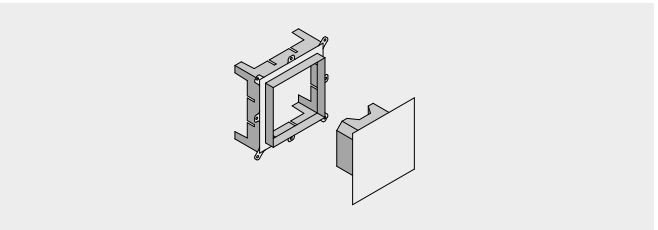


White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 250

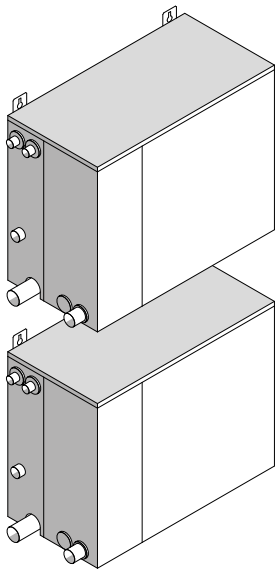

STEAM GENERATOR

Dimensions: cm 52 x 26 x 95 h

Features:

- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
- > SWF Smart Water Filling - Optimised management of boiler filling
- > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
- > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
- > ODS Open Door Sensor - Open Door Sensor
- > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
- > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6

Mounting box dimensions: cm 19 x 8 x 4,3 h

with Schlüter waterproofing mat

Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE (4 pcs.)

Mounting box: cm 18 x 10 x 15,2 h

with Schlüter waterproofing mat

Diffuser: cm 18,2 x 4,5 x 12,3 h

Features:

- > GLASS: glass front
- > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
- > Adjustable flaps to control the outgoing steam direction
- > Cubicle air-recirculation system built into the water-resistant fan
- > Essential oils container
- > Steam output led light
- > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER (8 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

Technical card download 

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C


A NUVOLA SMART 250

Space volume (cubic metres): 25 - 35 in insulated space with the use of 3 cm thick insulation panels
Power: 25,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 37 Kg/h max

Nuvola Smart 250	HA 50 50 0135	€ 11.200,00
------------------	---------------	-------------

B CONTROL PANELS


Choose the counterbox and the control panel model



Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model



SMART GLASS

(glass)



SMART CAMOUFLAGE

(to be covered)

IT IS NECESSARY TO ORDER 4 PIECES

Steam diffuser counterbox	CH 90 00 0187	€ 130,00 x 4
Glass	CH 75 00 0017	€ 390,00 x 4
Camouflage	CH 75 00 0042	€ 400,00 x 4




TRADITIONAL

IT IS NECESSARY TO ORDER 8 PIECES

Chrome	CH 75 00 0001	€ 95,00 x 8
Black matt PVD	CH 75 00 0038	€ 110,00 x 8
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 8

Options

NOTE: NUVOLA SMART 250 CAN POWER UP TO 4 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.




Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6

Mounting box dimensions: cm 19 x 8 x 4,3 h

with Schlüter waterproofing mat

Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00



Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2

Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat

IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K

 More information


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00



Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).

Home-Automation Device	ME 99 00 0421	€ 775,00
------------------------	---------------	----------

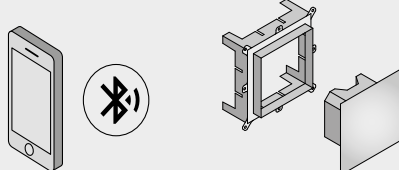

ESS - Effe Sound System

Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2


Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat

IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm

 More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00



White light fixture


Light fixture dimensions: cm 20 x 20 x 2

Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h

with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

NUVOLA SMART 360

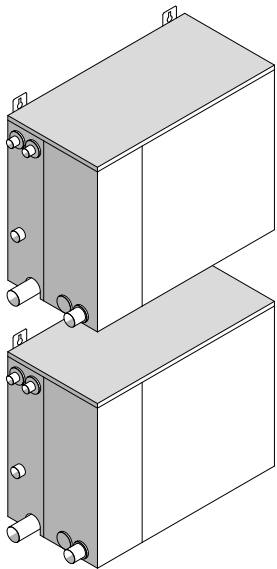

STEAM GENERATOR

- Dimensions: cm 52 x 26 x 95 h
- Features:
- > RWF Regulating water flow - Can work on a wide range of water systems with different pressures
 - > SWF Smart Water Filling - Optimised management of boiler filling
 - > SBC Smart Boiler Cleaning - Dilution and intermediate rinsing processes not time controlled but based on real need
 - > SEC Smart Energy Control - Evenly spaced on/off periods for the heating elements
 - > ODS Open Door Sensor - Open Door Sensor
 - > ECC 5.0 - Effe Comfort Control - This system is incorporated into every Effe steam generator so that the turkish bath can be remotely controlled, just download the app "MY EFFE" to your tablet or smartphone.
 - > Diverter carrying water to the outlet

REMOTE TOUCH-SCREEN CONTROL PANEL

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat
Price for the replacement of the internal standard control panel with backlit icons and temperature gauge

STEAM DIFFUSER SMART GLASS AND CAMOUFLAGE (4 pcs.)

- Mounting box: cm 18 x 10 x 15,2 h
with Schlüter waterproofing mat
Diffuser: cm 18,2 x 4,5 x 12,3 h
- Features:
- > GLASS: glass front
 - > CAMOUFLAGE: custom clad front, max thickness of cladding, including adhesive, 13 mm
 - > Adjustable flaps to control the outgoing steam direction
 - > Cubicle air-recirculation system built into the water-resistant fan
 - > Essential oils container
 - > Steam output led light
 - > Additional temperature probe inside the diffuser

TRADITIONAL STEAM DIFFUSER (8 pcs.)

Ø 5 x 3.5 cm with built-in container for essential oils

VIRTUAL DOOR-OPEN SENSOR

The generator automatically interrupts steam distribution when the door is left open for a long time.

Technical card download 

TO RECEIVE THE COMPLETE SYSTEM YOU KINDLY
NEED TO ORDER A+B+C


A NUVOLA SMART 360

Space volume (cubic metres): 35 - 50 in insulated space with the use of 3 cm thick insulation panels
Power: 36,0 kW max - 230Vac 1N 50-60Hz - 400Vac 3N 50-60Hz
Steam generation: 52,4 Kg/h max

Nuvola Smart 360	HA 50 50 0136	€ 11.200,00
------------------	---------------	-------------

B CONTROL PANELS

Choose the counterbox and the control panel model



Panel counterbox	CH 90 00 0182	€ 32,00
Internal control panel	ME 60 00 0042	€ 605,00
External control panel with remote temperature probe	ME 60 00 0049	€ 860,00

C STEAM DIFFUSER

Choose the counterbox and steam diffuser model



SMART GLASS	SMART CAMOUFLAGE
(glass)	(to be covered)

IT IS NECESSARY TO ORDER 4 PIECES

Steam diffuser counterbox	CH 90 00 0187	€ 130,00 x 4
Glass	CH 75 00 0017	€ 390,00 x 4
Camouflage	CH 75 00 0042	€ 400,00 x 4



TRADITIONAL


IT IS NECESSARY TO ORDER 8 PIECES

Chrome	CH 75 00 0001	€ 95,00 x 8
Black matt PVD	CH 75 00 0038	€ 110,00 x 8
Matt Gun Metal PVD	CH 75 00 0045	€ 150,00 x 8

ATTENTION:
On request, Effe can support of steam generators for more than 50 m³ volumes.

Options


NOTE: NUVOLA SMART 250 CAN POWER UP TO 4 OPTIONAL CEILING LIGHT FITTINGS OF YOUR CHOICE FROM THE ESS - EFFE SOUND SYSTEM, COLOUR THERAPY AND WHITE LIGHT.

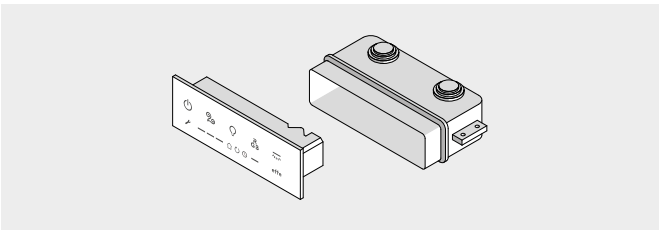

Additional remote touch-screen control panel

Control panel dimensions: cm 18 x 6
Mounting box dimensions: cm 19 x 8 x 4,3 h
with Schlüter waterproofing mat


Counterbox	CH 90 00 0182	€ 32,00
Remote touch-screen control panel	ME 60 00 0042	€ 605,00
Total Price		€ 637,00

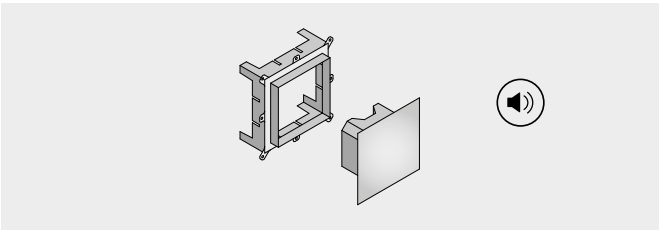

Ceiling light fixture with colour therapy, white light and passive loudspeakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm - 3.000 K
 More information


Counterbox	CH 90 00 0174	€ 73,00
Colour therapy and loudspeakers	HA 70 10 0005	€ 1.300,00
Total Price		€ 1.373,00

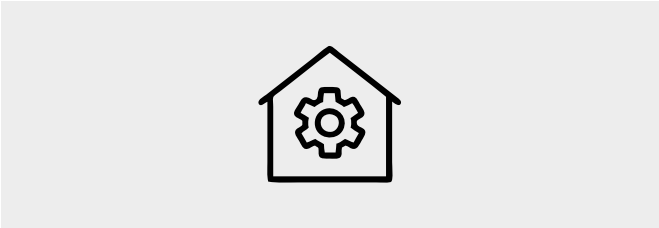

Home-Automation Device

Enables the product to be connected to and integrated with home-automation systems (power pack included).


Home-Automation Device	ME 99 00 0421	€ 775,00
------------------------	---------------	----------

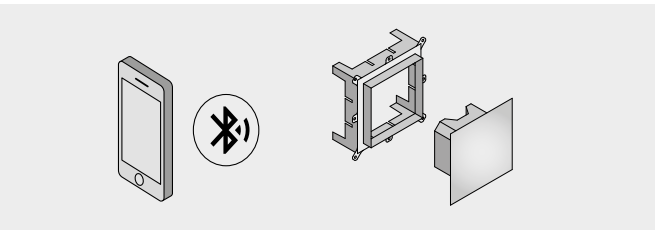

ESS - Effe Sound System
Kit with colour therapy, white light and Bluetooth speakers

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat
IP X5 class - Built-in loudspeakers, each 2W - 8 Ohm
 More information

Counterbox	CH 90 00 0174	€ 73,00
ESS kit with ceiling light fitting	HA 70 10 0008	€ 1.815,00
Total Price		€ 1.888,00

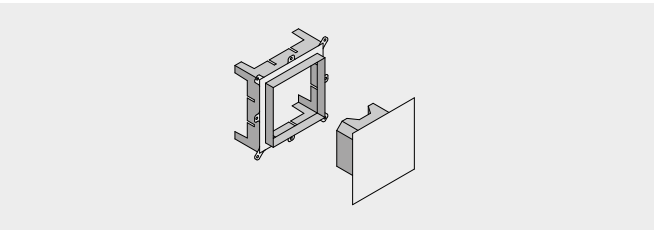

White light fixture

Light fixture dimensions: cm 20 x 20 x 2
Mounting box dimensions: cm 20,5 x 20,5 x 10,6 h
with Schlüter waterproofing mat - IP X5 class - 3.000 K

Counterbox	CH 90 00 0174	€ 73,00
White light fixture	HA 70 00 0009	€ 655,00
Total Price		€ 728,00

Porte e vetrate



Porta
Tuttovetro Inside



porta
Adapta



porta
Spazioslide



porta
Spaziofilo



porta
Tuttovetro
Contour



porta
Spazio

- 44

Adapta
porta in acciaio inox
realizzabile su misura
- 48

Spazioslide
porta scorrevole
acciaio inox lucido
- 50

Spaziofilo
porta a filo pavimento
acciaio inox lucido
- 54

Spazio
acciaio inox lucido
- 56

Tuttovetro Inside
porta in alluminio
realizzabile su misura
- 61

Tuttovetro Contour
porta in alluminio
realizzata su misura

ADAPTA 70



Download scheda tecnica 

Più informazioni: www.effe.it 

DIMENSIONI PORTA
cm 70 x 200 h

- MATERIALI**
- > Profili inox
 - > Vetro temperato trasparente 8 mm
 - > Cerniere

- CARATTERISTICHE**
- > Regolazione in larghezza e in altezza +/- 10mm
 - > Montaggio sul finito
 - > Porta con chiusura a battente
 - > Filo pavimento con profilo di tenuta
 - > Cerniere su montante con apertura a 90°
 - > Sistema di guarnizioni per tenuta a vapore
 - > Raggio di apertura 66 cm
 - > Finiture:
 - Inox lucido
 - Inox satinato

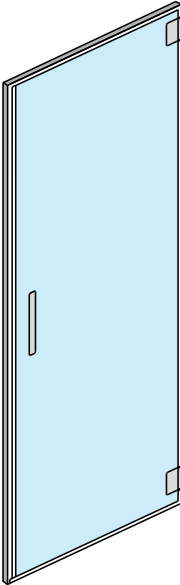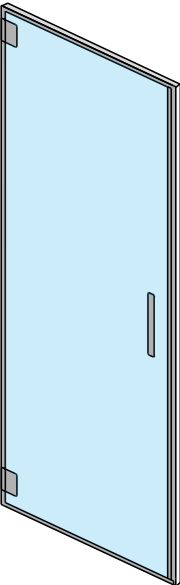

ADAPTA 70 DX		
Inox lucido	HP 90 04 0001	€ 2.100,00
Inox satinato	HP 90 05 0001	€ 2.100,00

ADAPTA 70 SX		
Inox lucido	HP 90 04 0002	€ 2.100,00
Inox satinato	HP 90 05 0002	€ 2.100,00

Disponibili su richiesta finiture PVD: rame satinato, bronzo satinato, nero satinato
Con supplemento costo di € 1.400

ADAPTA 120



Download scheda tecnica 

Più informazioni: www.effe.it 

DIMENSIONI PORTA
cm 120 x 200 h

- MATERIALI**
- > Profili inox
 - > Vetro temperato trasparente 8 mm
 - > Cerniere

- CARATTERISTICHE**
- > Regolazione in larghezza e in altezza +/- 10mm
 - > Montaggio sul finito
 - > Porta con chiusura a battente
 - > Filo pavimento con profilo di tenuta
 - > Cerniere su montante con apertura a 90°
 - > Sistema di guarnizioni per tenuta a vapore
 - > Raggio di apertura 66 cm
 - > Finiture:
 - Inox lucido
 - Inox satinato

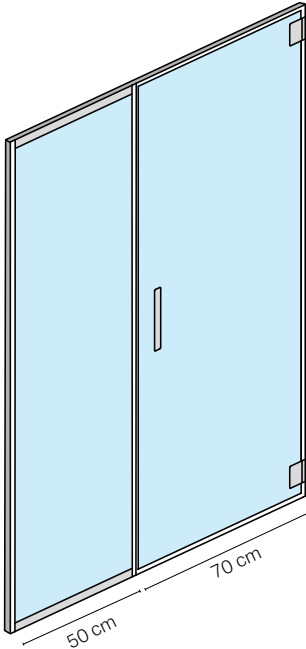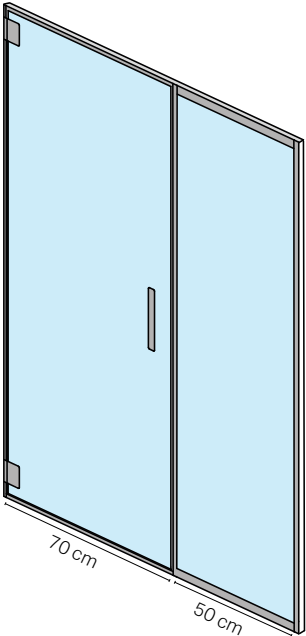


ADAPTA 120 DX		
Inox lucido	HP 90 04 0003	€ 3.050,00
Inox satinato	HP 90 05 0003	€ 3.050,00

ADAPTA 120 SX		
Inox lucido	HP 90 04 0004	€ 3.050,00
Inox satinato	HP 90 05 0004	€ 3.050,00

Disponibili su richiesta finiture PVD: rame satinato, bronzo satinato, nero satinato
Con supplemento costo di € 2.310


ADAPTA

Su misura




DIMENSIONI PORTA
cm 70 x 200 h

+/- 20 cm in larghezza
+ 10% dal prezzo di listino

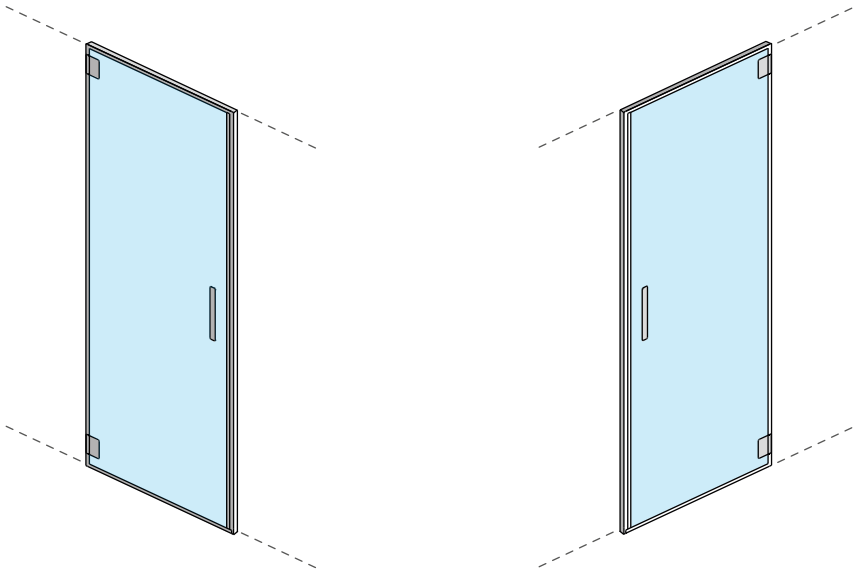

DIMENSIONI PORTA
cm 120 x 200 h


+/- 20 cm in larghezza
+ 15% dal prezzo di listino

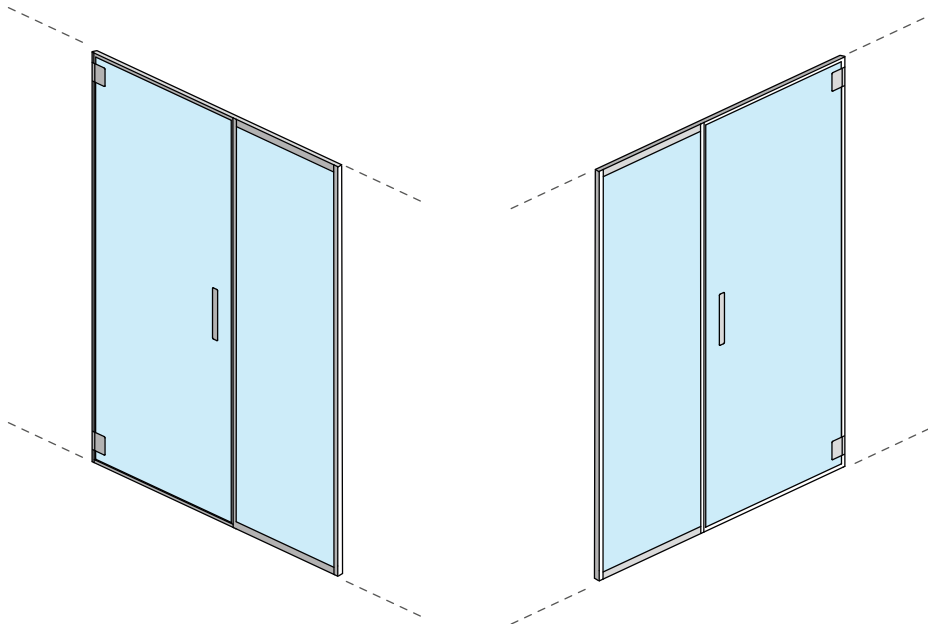

Per personalizzazione in altre dimensioni chiedere quotazione a EFFE.

ADAPTA

Su misura



Disponibili su richiesta finiture PVD:



Rame satinato




Bronzo satinato



Nero satinato

Informazioni Tecniche

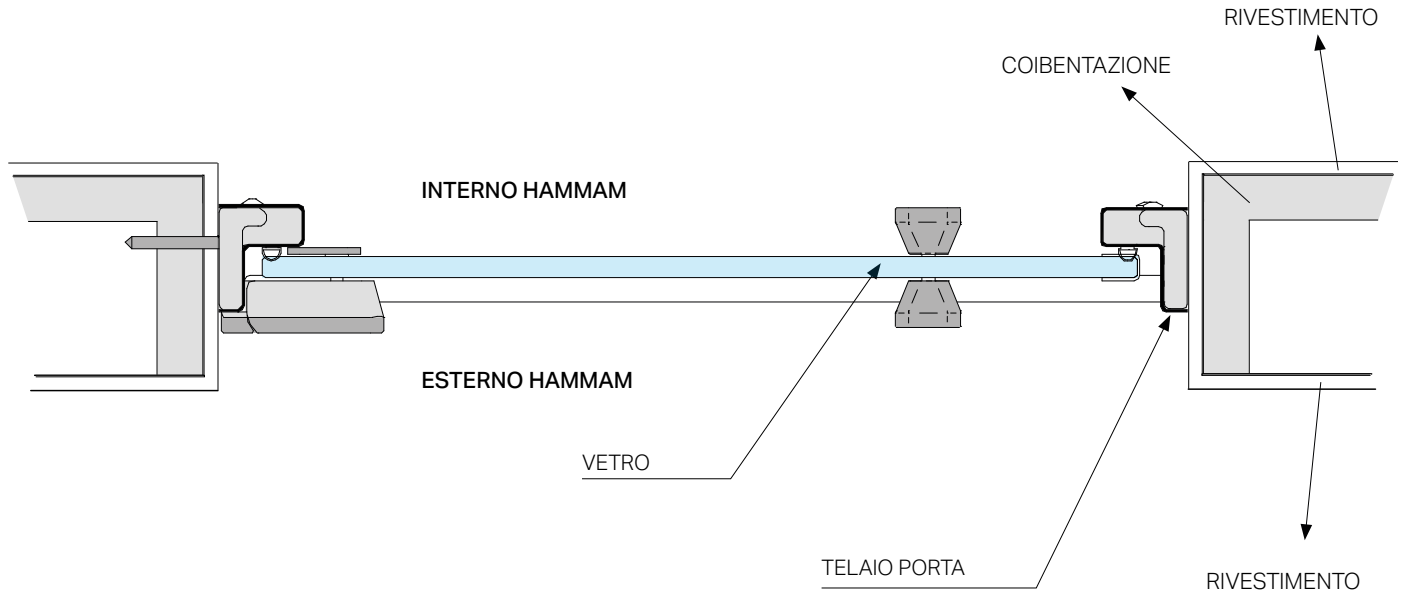

SPAZIOSLIDE 130


Download scheda tecnica 

DIMENSIONI PORTA
cm 130 x 200 h

DIMENSIONI CONTROTELAIO
cm 138 x 208 h

MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Apertura scorrevole
Disponibile in versione destra o sinistra
Montaggio su controtelaio
Aerazione inferiore
Luce netta di passaggio 54 cm

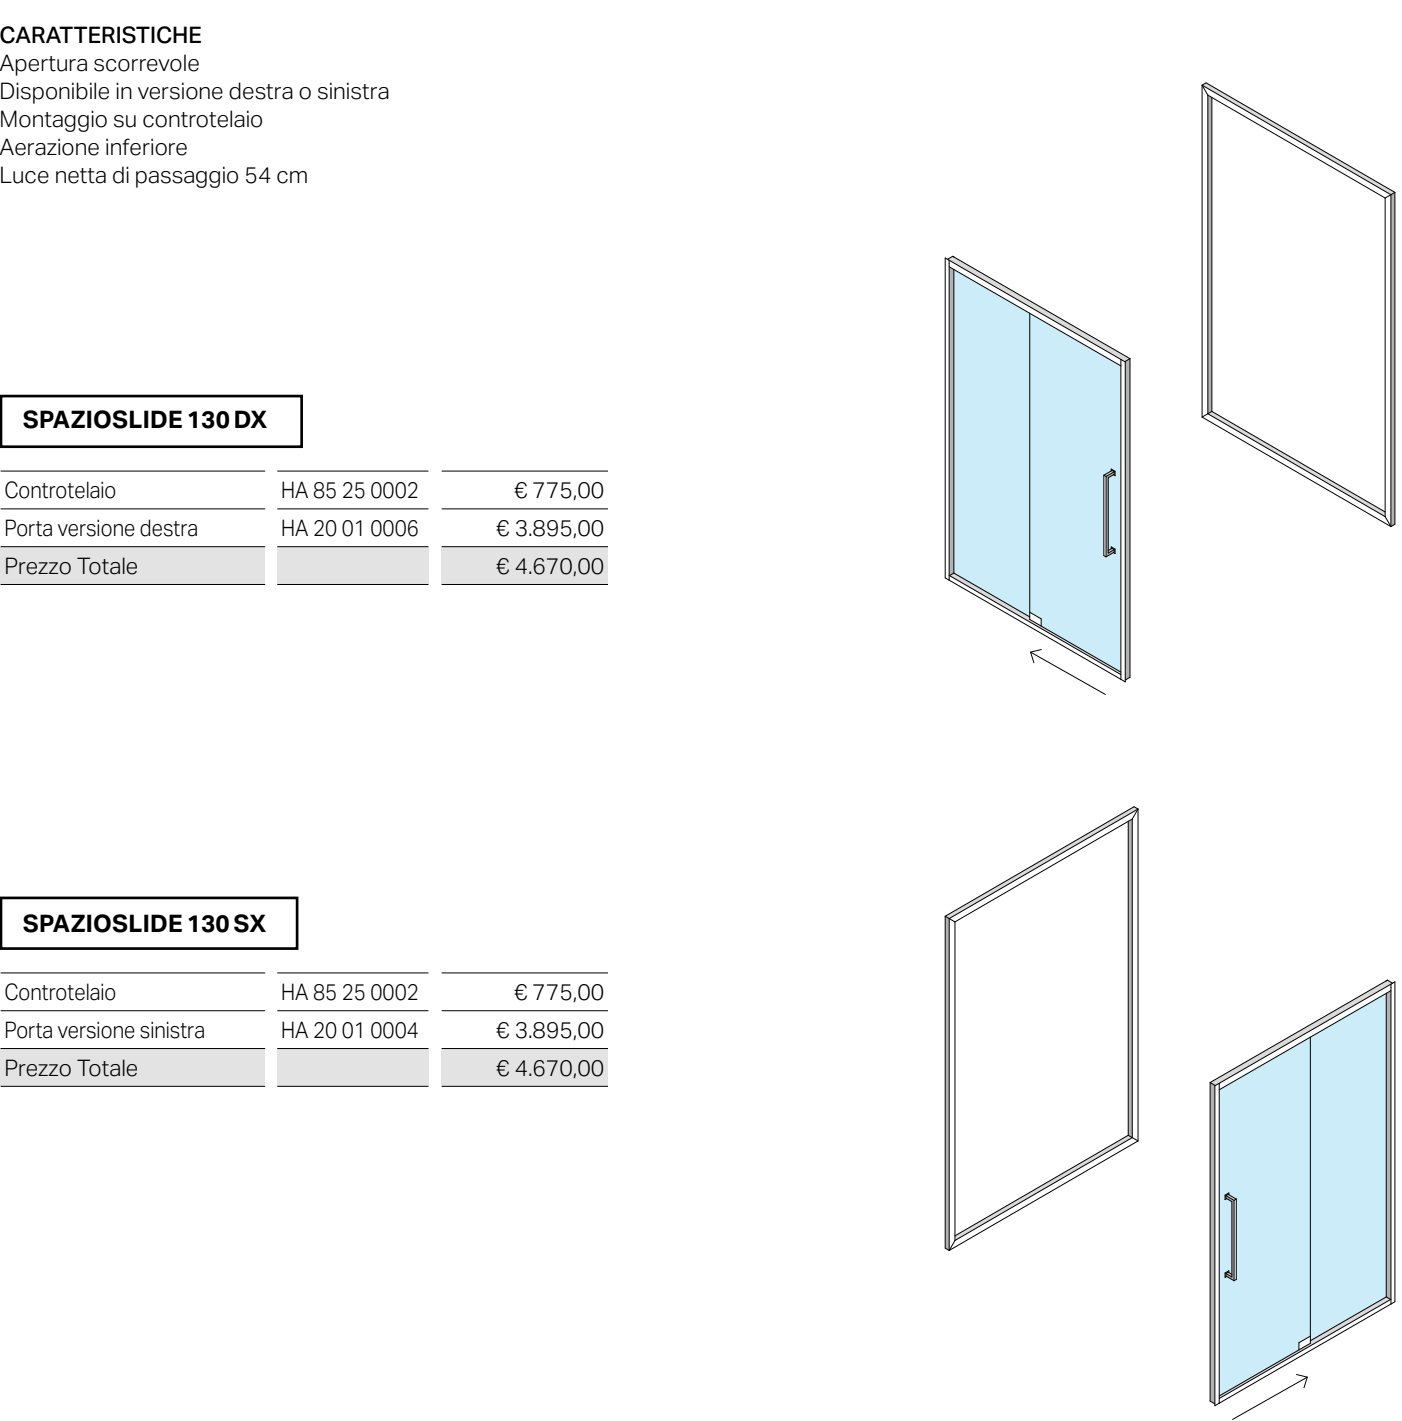

SPAZIOSLIDE 130 DX		
Controtelaio	HA 85 25 0002	€ 775,00
Porta versione destra	HA 20 01 0006	€ 3.895,00
Prezzo Totale		€ 4.670,00

SPAZIOSLIDE 130 SX		
Controtelaio	HA 85 25 0002	€ 775,00
Porta versione sinistra	HA 20 01 0004	€ 3.895,00
Prezzo Totale		€ 4.670,00

SPAZIOSLIDE 160


Download scheda tecnica 

DIMENSIONI PORTA
cm 160 x 200 h

DIMENSIONI CONTROTELAIO
cm 168 x 208 h

MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Apertura scorrevole
Disponibile in versione destra o sinistra
Montaggio su controtelaio
Aerazione inferiore
Luce netta di passaggio 71 cm

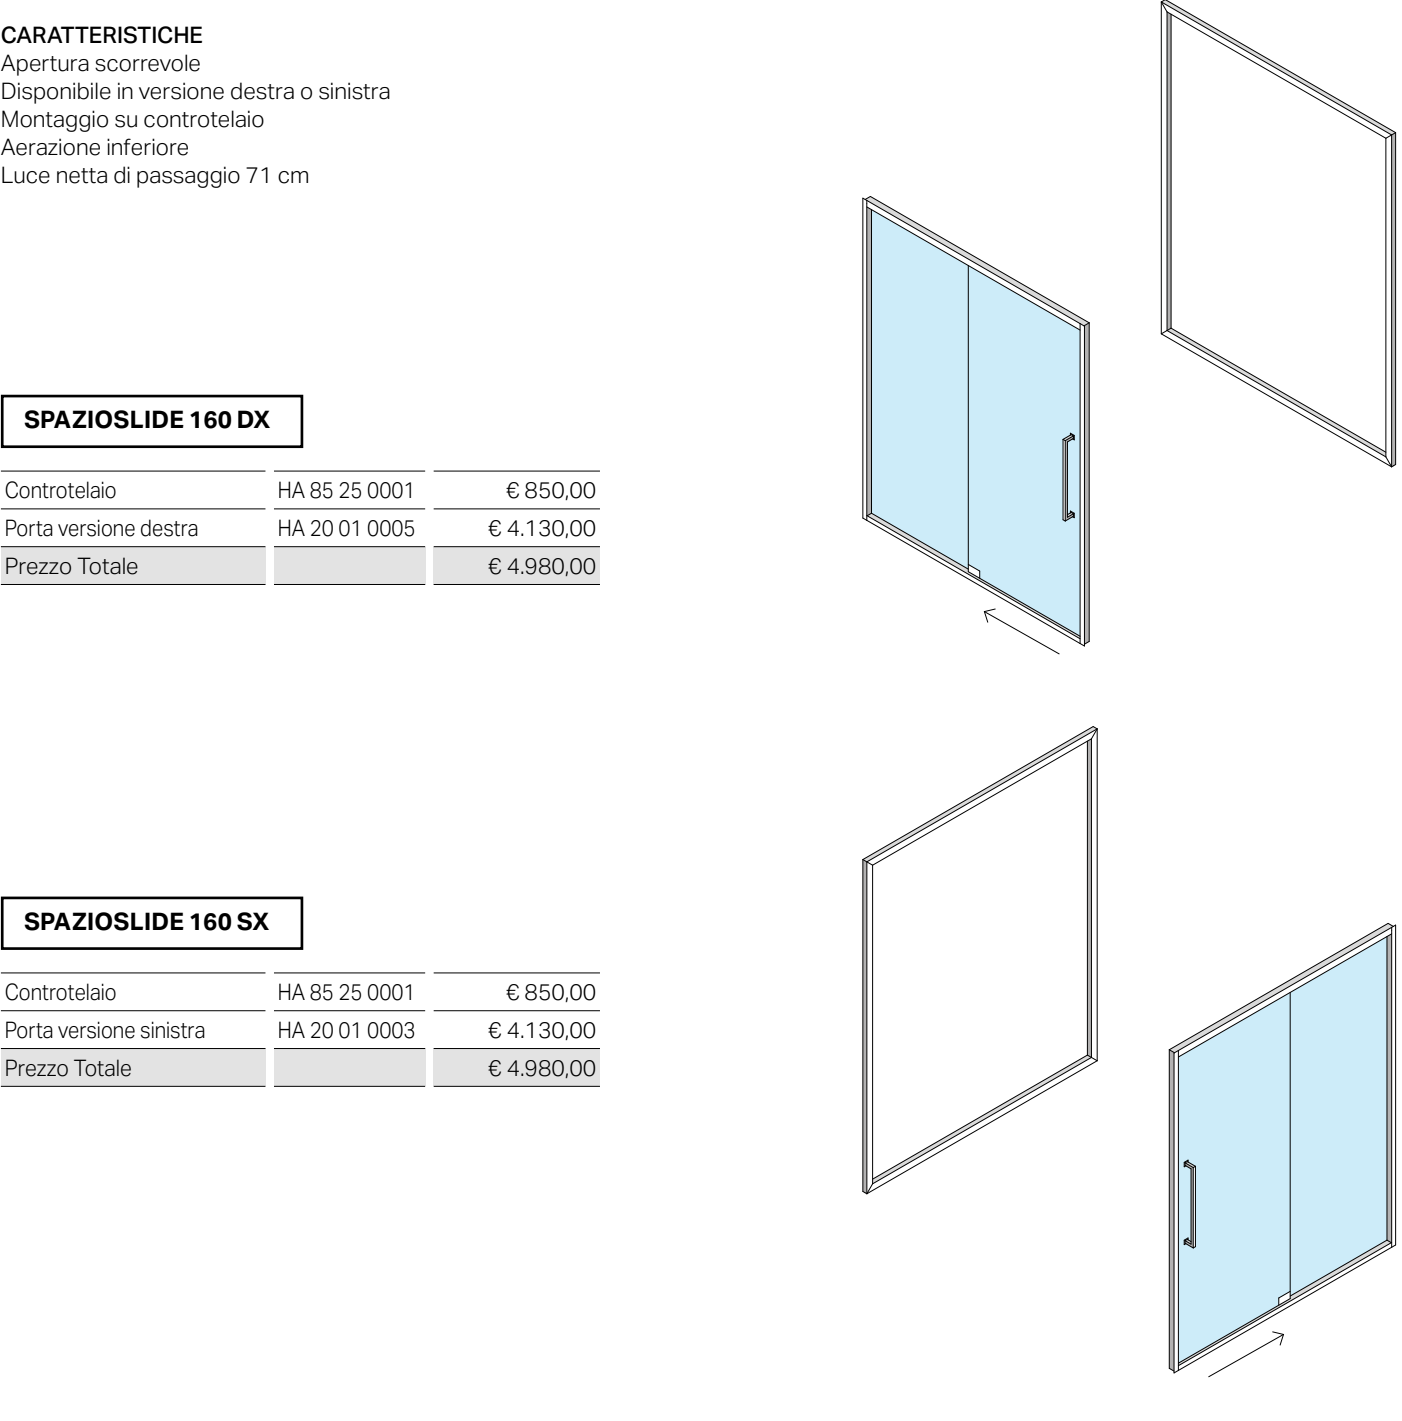

SPAZIOSLIDE 160 DX		
Controtelaio	HA 85 25 0001	€ 850,00
Porta versione destra	HA 20 01 0005	€ 4.130,00
Prezzo Totale		€ 4.980,00

SPAZIOSLIDE 160 SX		
Controtelaio	HA 85 25 0001	€ 850,00
Porta versione sinistra	HA 20 01 0003	€ 4.130,00
Prezzo Totale		€ 4.980,00

SPAZIOFILO 80

DIMENSIONI PORTA
cm 80 x 198 h

DIMENSIONI CONTROTELAIO
cm 88 x 202 h



MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Porta con apertura classica
A filo pavimento
Disponibile in versione destra o sinistra
Montaggio su controteilaio
Aerazione inferiore
Raggio d'apertura 75 cm

SPAZIOFILO 80 DX		
Controteilaio	HA 85 35 0001	€ 530,00
Porta versione destra	HA 30 01 0004	€ 2.395,00
Prezzo Totale		€ 2.925,00

SPAZIOFILO 80 SX		
Controteilaio	HA 85 35 0001	€ 530,00
Porta versione sinistra	HA 30 01 0007	€ 2.395,00
Prezzo Totale		€ 2.925,00

Download scheda tecnica

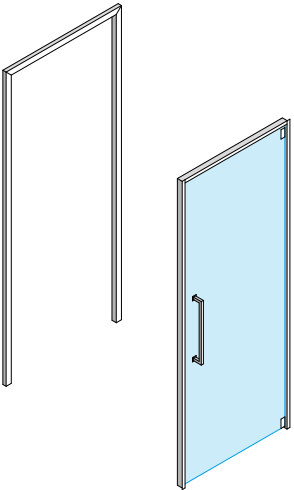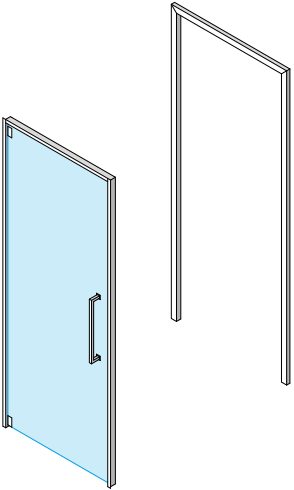

SPAZIOFILO 100

DIMENSIONI PORTA
cm 100 x 198 h

DIMENSIONI CONTROTELAIO
cm 108 x 202 h



MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Porta con apertura classica
A filo pavimento
Disponibile in versione destra o sinistra
Montaggio su controteilaio
Aerazione inferiore
Raggio d'apertura 95 cm

SPAZIOFILO 100 DX		
Controteilaio	HA 85 35 0019	€ 580,00
Porta versione destra	HA 30 01 0019	€ 3.225,00
Prezzo Totale		€ 3.805,00

SPAZIOFILO 100 SX		
Controteilaio	HA 85 35 0019	€ 580,00
Porta versione sinistra	HA 30 01 0020	€ 3.225,00
Prezzo Totale		€ 3.805,00

Download scheda tecnica

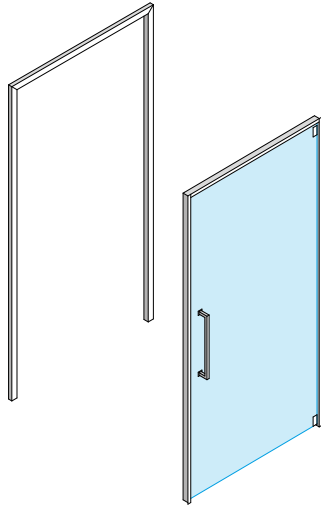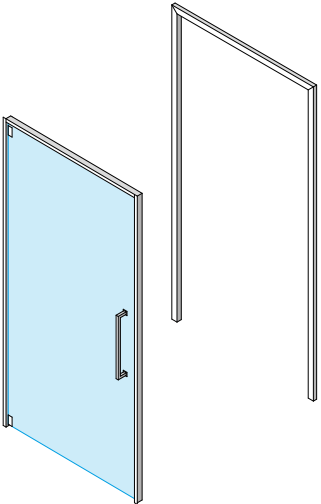

SPAZIOFILO 120


Download scheda tecnica 

DIMENSIONI PORTA
cm 120 x 198 h

DIMENSIONI CONTROTELAIO
cm 128 x 202 h

MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Porta con apertura classica
A filo pavimento
Disponibile in versione destra o sinistra
Montaggio su controteelaio
Aerazione inferiore
Raggio d'apertura 75 cm

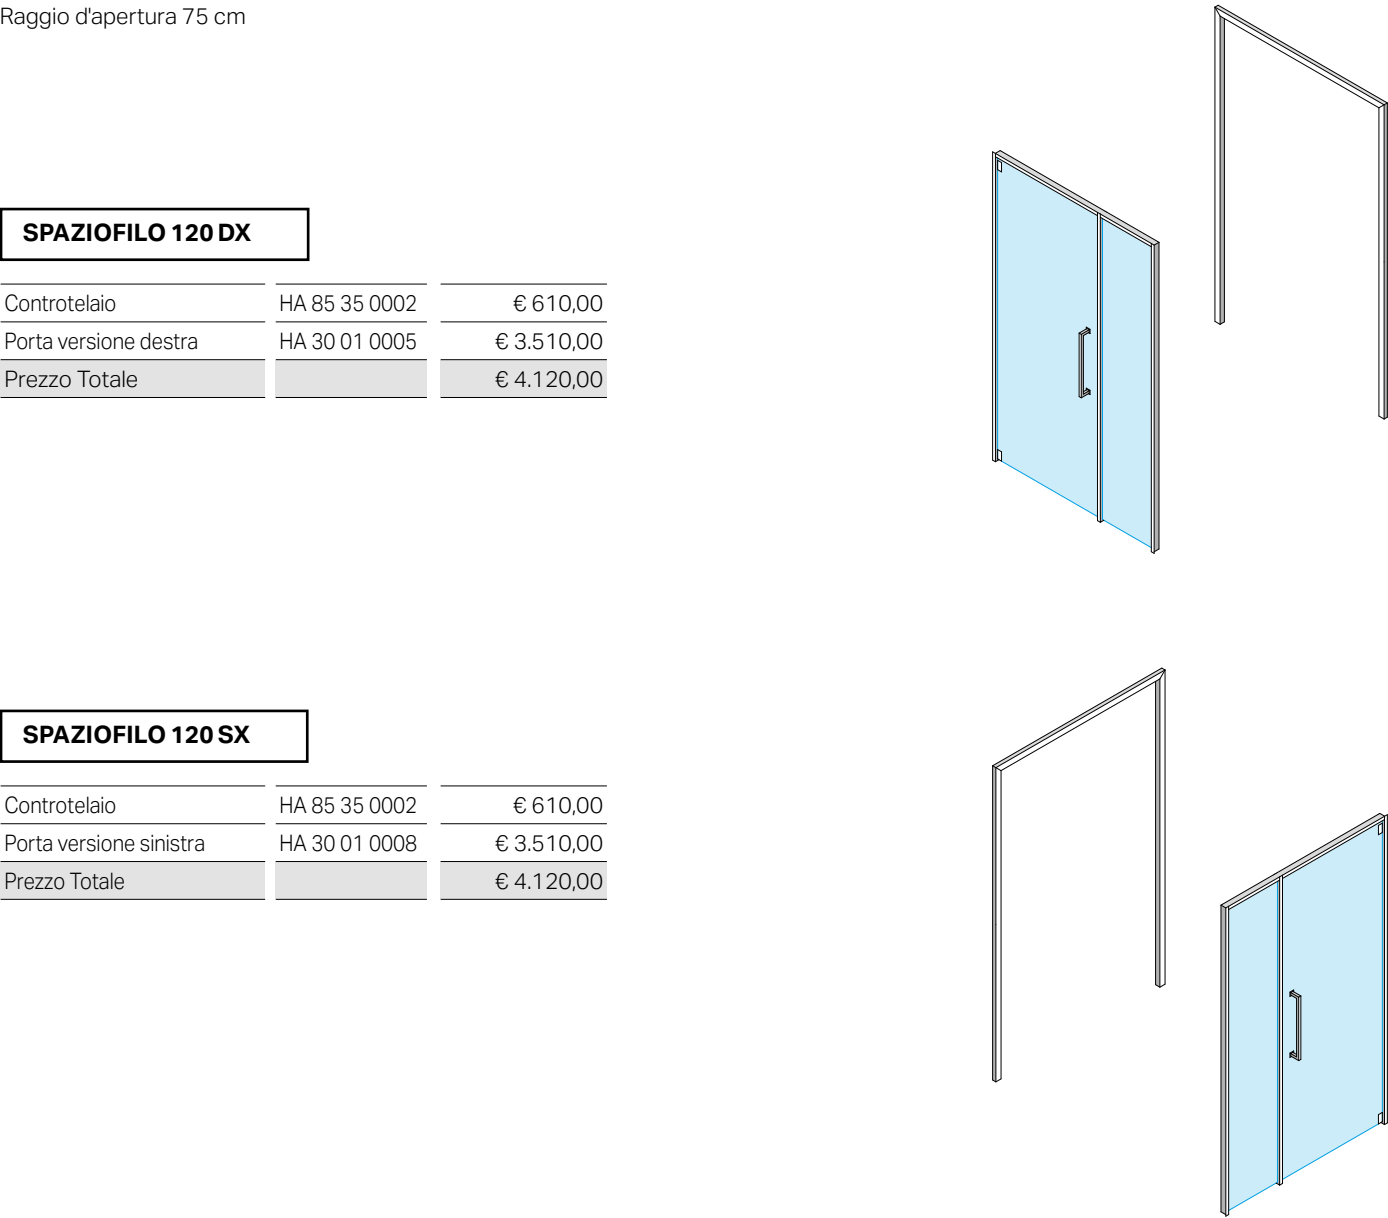

SPAZIOFILO 120 DX		
Controtelaio	HA 85 35 0002	€ 610,00
Porta versione destra	HA 30 01 0005	€ 3.510,00
Prezzo Totale		€ 4.120,00

SPAZIOFILO 120 SX		
Controtelaio	HA 85 35 0002	€ 610,00
Porta versione sinistra	HA 30 01 0008	€ 3.510,00
Prezzo Totale		€ 4.120,00

SPAZIOFILO 160


Download scheda tecnica 

DIMENSIONI PORTA
cm 160 x 198 h

DIMENSIONI CONTROTELAIO
cm 168 x 202 h

MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Porta con apertura classica
A filo pavimento
Disponibile in versione destra o sinistra
Montaggio su controteelaio
Aerazione inferiore
Raggio d'apertura 75 cm

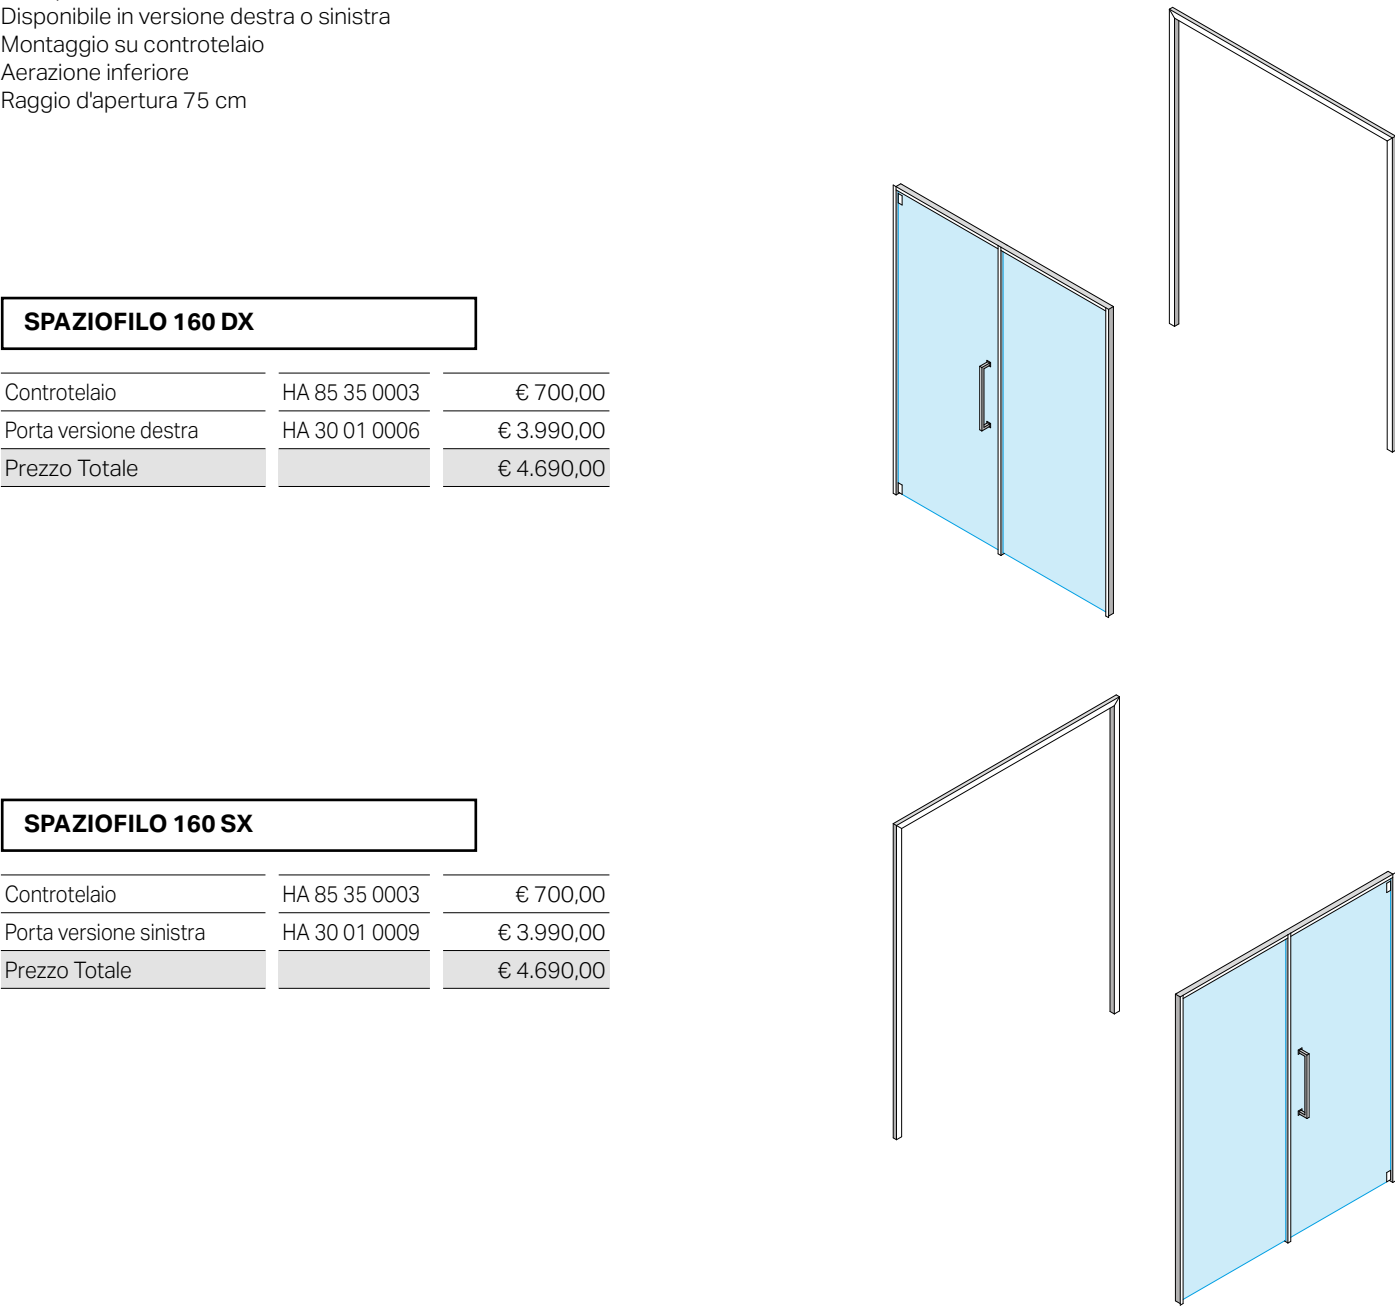


SPAZIOFILO 160 DX		
Controtelaio	HA 85 35 0003	€ 700,00
Porta versione destra	HA 30 01 0006	€ 3.990,00
Prezzo Totale		€ 4.690,00

SPAZIOFILO 160 SX		
Controtelaio	HA 85 35 0003	€ 700,00
Porta versione sinistra	HA 30 01 0009	€ 3.990,00
Prezzo Totale		€ 4.690,00

PORTE E VETRATE SPAZIO

Informazioni tecniche

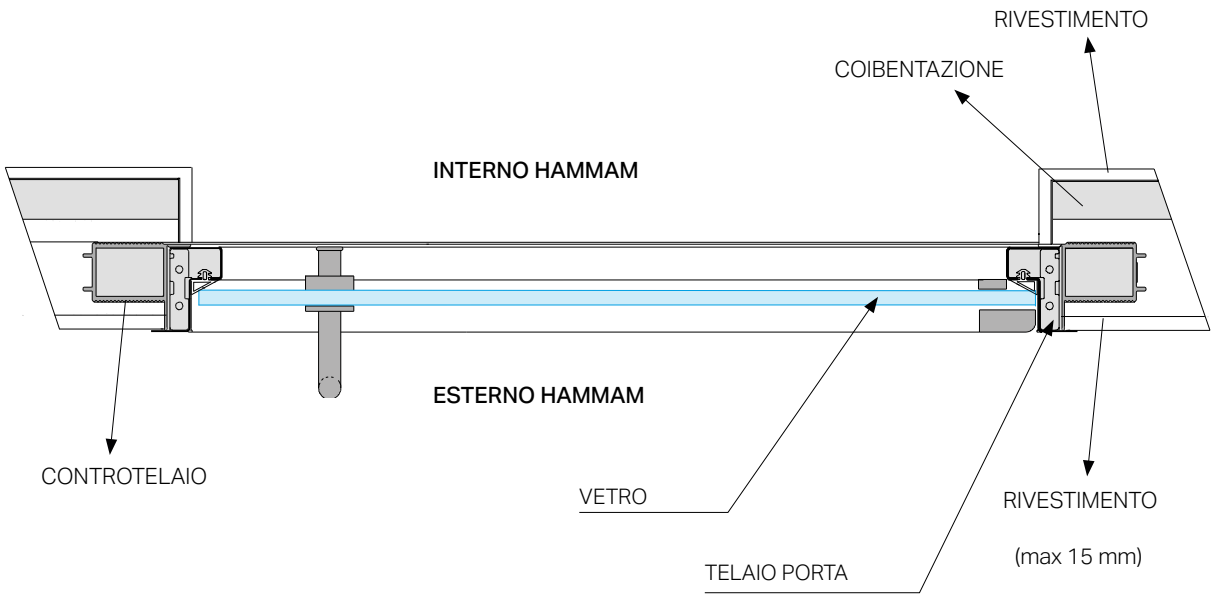

SPAZIO 80

DIMENSIONI PORTA
cm 80 x 200 h


DIMENSIONI CONTROTELAIO
cm 88 x 208 h

MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Porta con apertura classica
Reversibile
Montaggio su controte­laio
Aerazione inferiore
Raggio d'apertura 75 cm

SPAZIO 80		
Controte­laio	HA 85 40 0477	€ 610,00
Porta	HA 60 05 0078	€ 2.210,00
Prezzo Totale		€ 2.820,00

[Download scheda tecnica](#) 

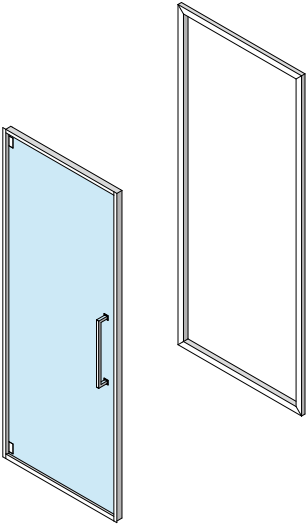

SPAZIO 120

DIMENSIONI PORTA
cm 120 x 200 h


DIMENSIONI CONTROTELAIO
cm 128 x 208 h

MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Porta con apertura classica
Reversibile
Montaggio su controte­laio
Aerazione inferiore
Raggio d'apertura 75 cm

SPAZIO 120		
Controte­laio	HA 85 40 0518	€ 610,00
Porta	HA 60 05 0079	€ 3.120,00
Prezzo Totale		€ 3.730,00

[Download scheda tecnica](#) 

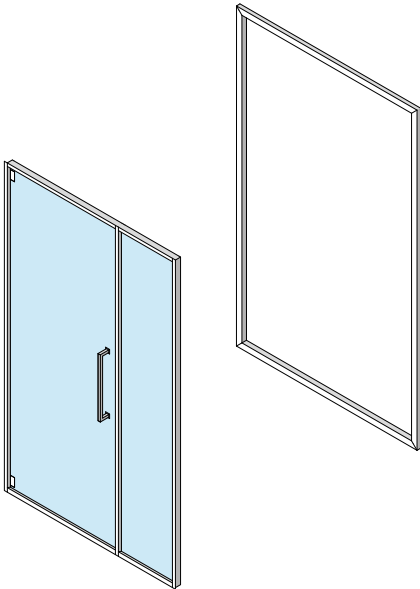

SPAZIO 160

DIMENSIONI PORTA
cm 160 x 200 h


DIMENSIONI CONTROTELAIO
cm 168 x 208 h

MATERIALI
Telaio in alluminio
Cover in acciaio inox lucido
Maniglia in acciaio inox lucido
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Porta con apertura classica
Reversibile
Montaggio su controte­laio
Aerazione inferiore
Raggio d'apertura 75 cm

SPAZIO 160		
Controte­laio	HA 85 40 0793	€ 700,00
Porta	HA 60 05 0080	€ 3.605,00
Prezzo Totale		€ 4.305,00

[Download scheda tecnica](#) 

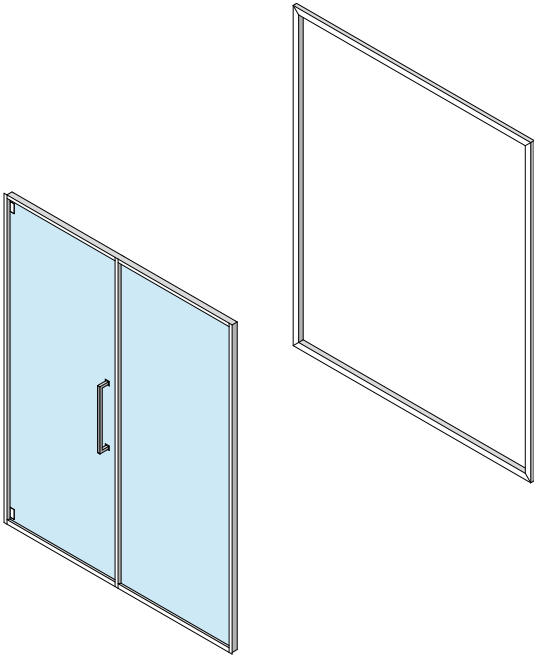

TUTTOVETRO INSIDE 70

DIMENSIONI PORTA
cm 70 x 210 h


DIMENSIONI CONTROTELAIO
cm 77,6 x 217,6 h

MATERIALI
Finiture disponibili:
profili in alluminio finitura brillantata
profili in alluminio finitura spazzolata
profili in alluminio finitura anodizzata nero opaco


Telaio in alluminio
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Montaggio su controteलाio

TUTTOVETRO INSIDE 70 DX		
Controteलाio	HT 60 00 0007	€ 450,00
Porta in alluminio finitura brillantata	HP 60 03 0007	€ 1.985,00
Prezzo Totale		€ 2.435,00
Controteलाio	HT 60 00 0007	€ 450,00
Porta in alluminio finitura spazzolata	HP 60 01 0007	€ 2.420,00
Prezzo Totale		€ 2.870,00
Controteलाio	HT 60 00 0007	€ 450,00
Porta in alluminio finitura anodizzata nero opaco	HP 60 02 0007	€ 2.795,00
Prezzo Totale		€ 3.245,00

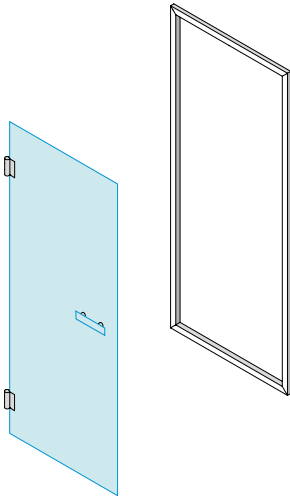

TUTTOVETRO INSIDE 70 SX		
Controteलाio	HT 60 00 0008	€ 450,00
Porta in alluminio finitura brillantata	HP 60 03 0008	€ 1.985,00
Prezzo Totale		€ 2.435,00
Controteलाio	HT 60 00 0008	€ 450,00
Porta in alluminio finitura spazzolata	HP 60 01 0008	€ 2.420,00
Prezzo Totale		€ 2.870,00
Controteलाio	HT 60 00 0008	€ 450,00
Porta in alluminio finitura anodizzata nero opaco	HP 60 02 0008	€ 2.795,00
Prezzo Totale		€ 3.245,00

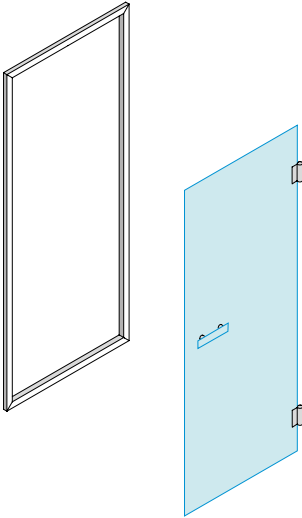

TUTTOVETRO INSIDE 120

DIMENSIONI PORTA
cm 120 x 210 h


DIMENSIONI CONTROTELAIO
cm 127,6 x 217,6 h

MATERIALI
Finiture disponibili:
profili in alluminio finitura brillantata
profili in alluminio finitura spazzolata
profili in alluminio finitura anodizzata nero opaco


Telaio in alluminio
Vetro temperato trasparente 8 mm

CARATTERISTICHE
Montaggio su controteलाio

TUTTOVETRO INSIDE 120 DX		
Controteलाio	HT 60 00 0009	€ 470,00
Porta in alluminio finitura brillantata	HP 60 03 0009	€ 2.335,00
Prezzo Totale		€ 2.805,00
Controteलाio	HT 60 00 0009	€ 470,00
Porta in alluminio finitura spazzolata	HP 60 01 0009	€ 2.875,00
Prezzo Totale		€ 3.345,00
Controteलाio	HT 60 00 0009	€ 470,00
Porta in alluminio finitura anodizzata nero opaco	HP 60 02 0009	€ 3.280,00
Prezzo Totale		€ 3.750,00

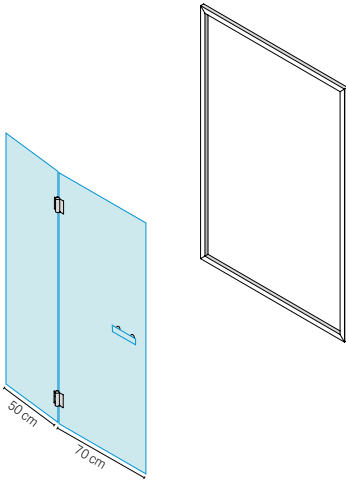

TUTTOVETRO INSIDE 120 SX		
Controteलाio	HT 60 00 0010	€ 470,00
Porta in alluminio finitura brillantata	HP 60 03 0010	€ 2.335,00
Prezzo Totale		€ 2.805,00
Controteलाio	HT 60 00 0010	€ 470,00
Porta in alluminio finitura spazzolata	HP 60 01 0010	€ 2.875,00
Prezzo Totale		€ 3.345,00
Controteलाio	HT 60 00 0010	€ 470,00
Porta in alluminio finitura anodizzata nero opaco	HP 60 02 0010	€ 3.280,00
Prezzo Totale		€ 3.750,00

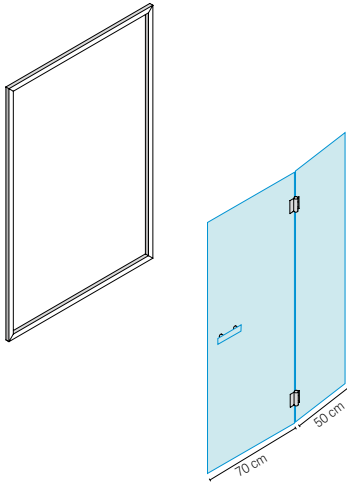

TUTTOVETRO INSIDE 170

Download scheda tecnica

DIMENSIONI PORTA
cm 170 x 210 h

DIMENSIONI CONTROTELAIO
cm 177,6 x 217,6 h



MATERIALI
Finiture disponibili:
profili in alluminio finitura brillantata
profili in alluminio finitura spazzolata
profili in alluminio finitura anodizzata nero opaco

Telaio in alluminio
Vetro temperato trasparente 8 mm


CARATTERISTICHE
Montaggio su controtelaio

TUTTOVETRO INSIDE 170 DX		
Controtelaio	HT 60 00 0011	€ 490,00
Porta in alluminio finitura brillantata	HP 60 03 0011	€ 2.685,00
Prezzo Totale		€ 3.175,00
Controtelaio	HT 60 00 0011	€ 490,00
Porta in alluminio finitura spazzolata	HP 60 01 0011	€ 3.305,00
Prezzo Totale		€ 3.795,00
Controtelaio	HT 60 00 0011	€ 490,00
Porta in alluminio finitura anodizzata nero opaco	HP 60 02 0011	€ 3.760,00
Prezzo Totale		€ 4.250,00

TUTTOVETRO INSIDE 170 SX		
Controtelaio	HT 60 00 0012	€ 490,00
Porta in alluminio finitura brillantata	HP 60 03 0012	€ 2.685,00
Prezzo Totale		€ 3.175,00
Controtelaio	HT 60 00 0012	€ 490,00
Porta in alluminio finitura spazzolata	HP 60 01 0012	€ 3.305,00
Prezzo Totale		€ 3.795,00
Controtelaio	HT 60 00 0012	€ 490,00
Porta in alluminio finitura anodizzata nero opaco	HP 60 02 0012	€ 3.760,00
Prezzo Totale		€ 4.250,00

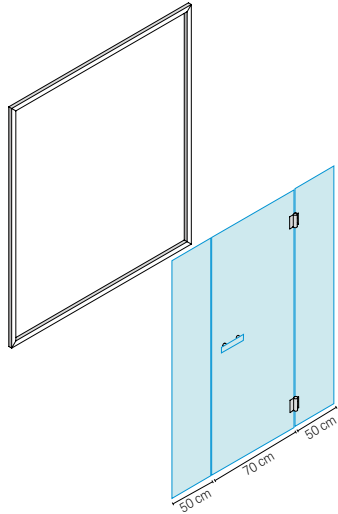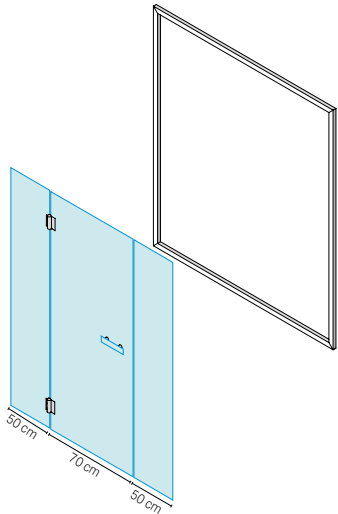


TUTTOVETRO INSIDE




MATERIALI / CARATTERISTICHE
Altezza massima 250 cm

Larghezza netta / altezza netta =
dimensioni del muro finito e piastrellato

FINO A 219 CM
2 CERNIERE
MANIGLIA ORIZZONTALE

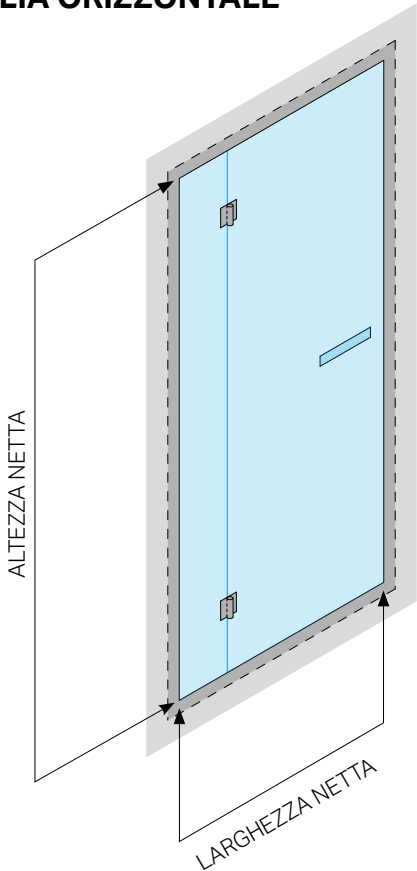

DA 220 CM E OLTRE
3 CERNIERE
MANIGLIA VERTICALE

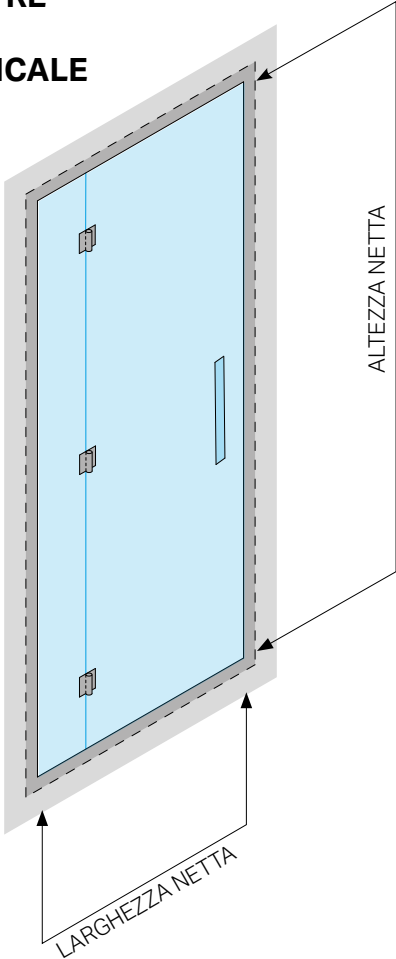

ALLUMINIO
profili in alluminio finitura
brillantata





ALLUMINIO SPAZZOLATO
profili in alluminio finitura
spazzolata




NERO
profili in alluminio finitura
anodizzata nero opaco

SEZIONE

Download scheda tecnica

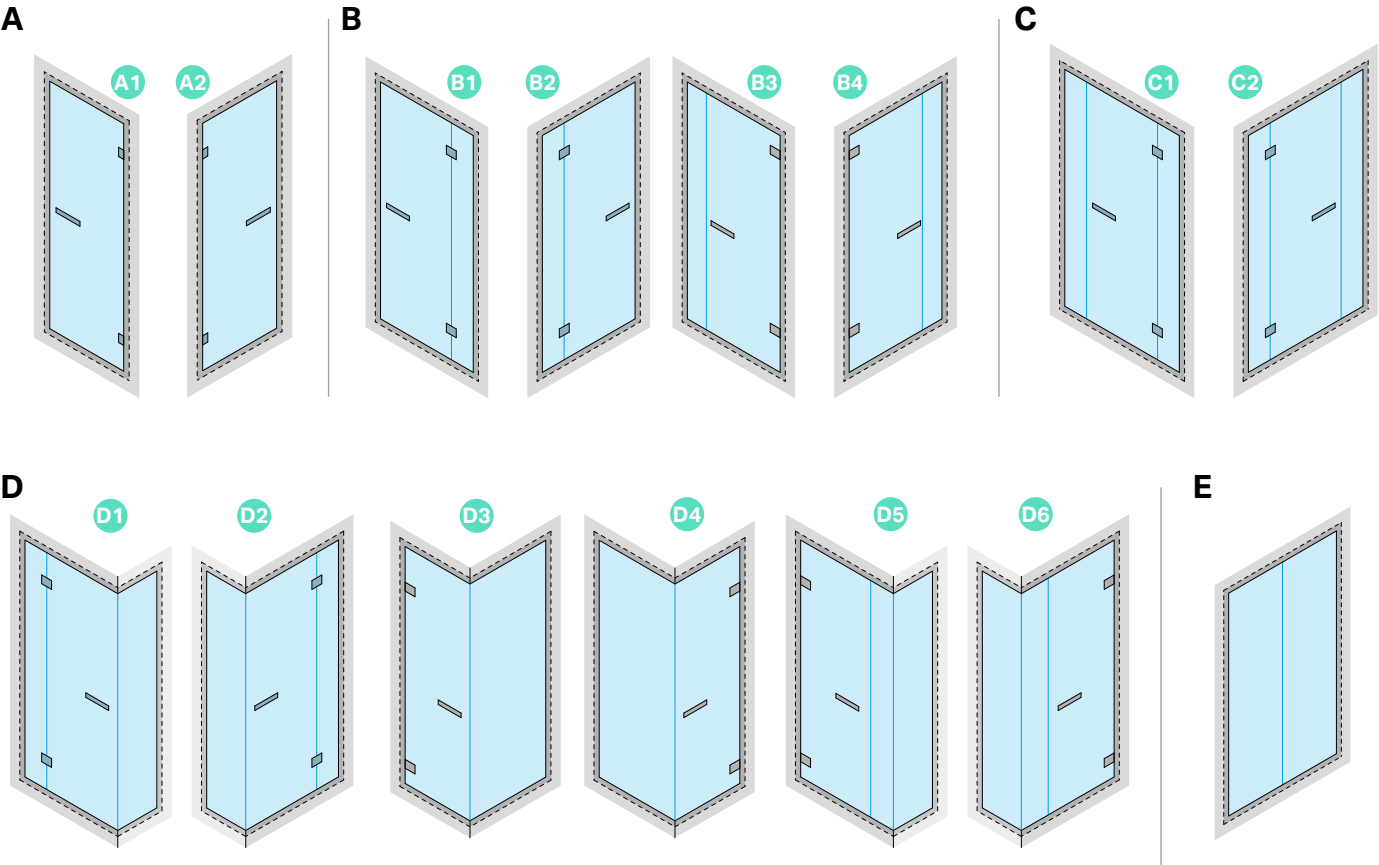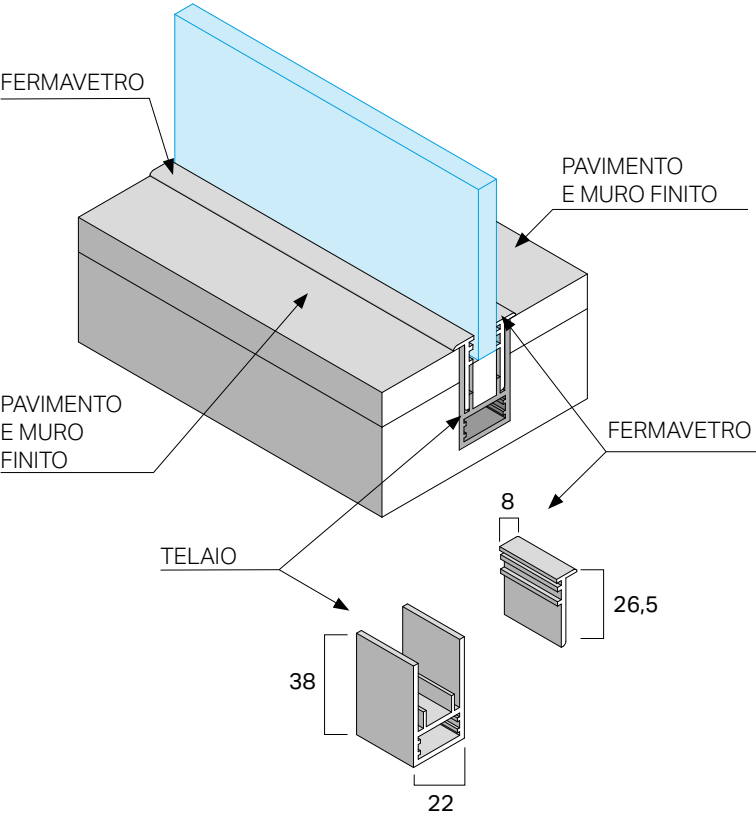

TUTTOVETRO CONTOUR




MATERIALI / CARATTERISTICHE
larghezza massima 350 cm*
altezza massima 250 cm

Larghezza netta / altezza netta =
dimensioni del muro finito e piastrellato

* per dimensioni superiori contattare Effe

FINO A 220< CM
2 CERNIERE
MANIGLIA ORIZZONTALE

DA 220≥ CM E OLTRE
3 CERNIERE
MANIGLIA VERTICALE

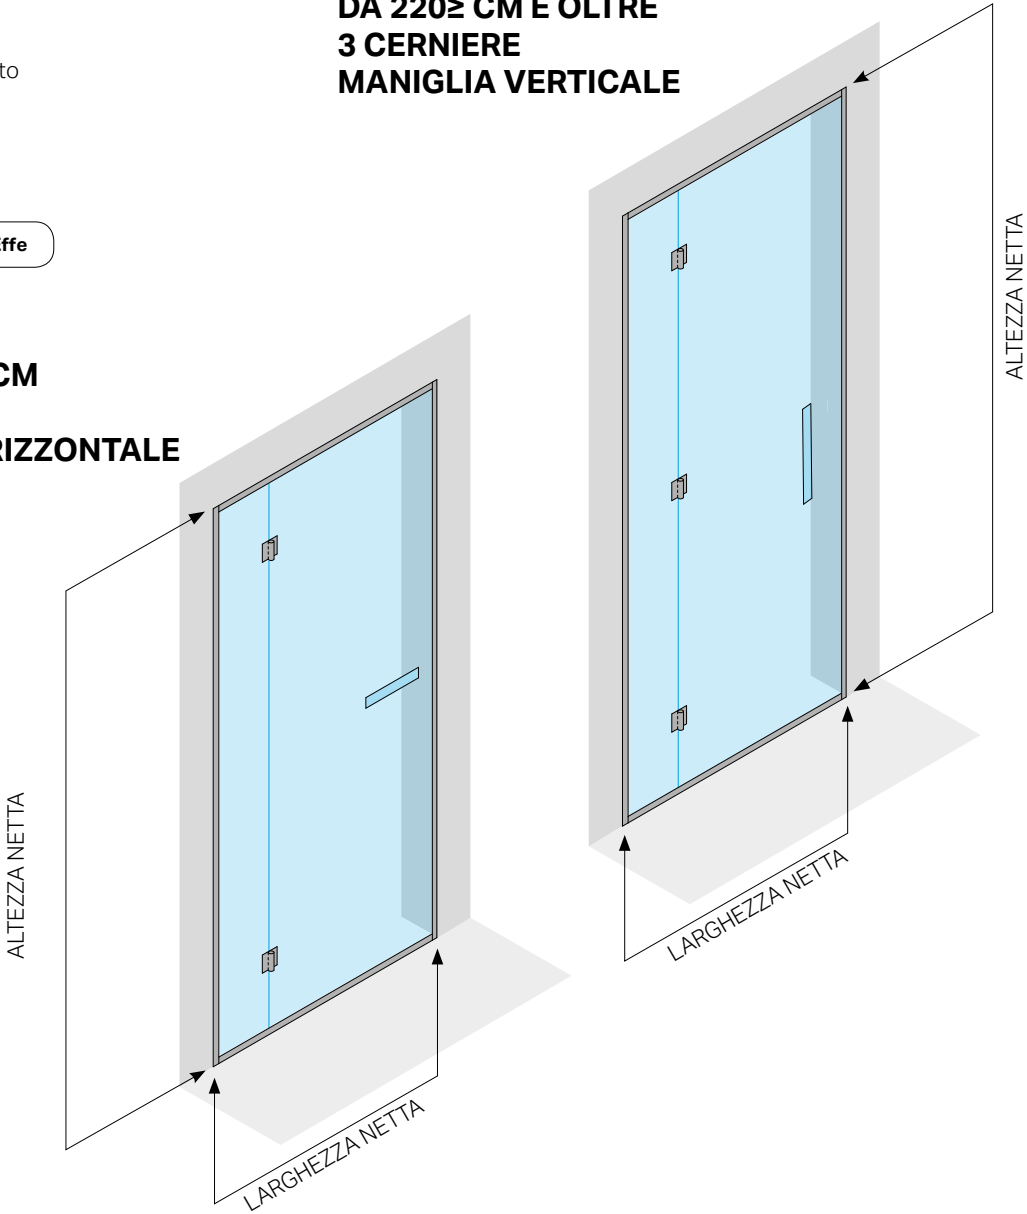

ALLUMINIO
profili in alluminio finitura
brillantata









ALLUMINIO SPAZZOLATO
profili in alluminio finitura
spazzolata




NERO
profili in alluminio finitura
anodizzata nero opaco

SEZIONE

ESTERNO HAMMAM

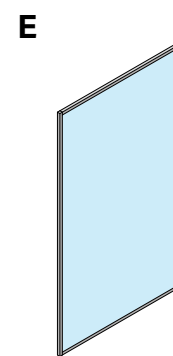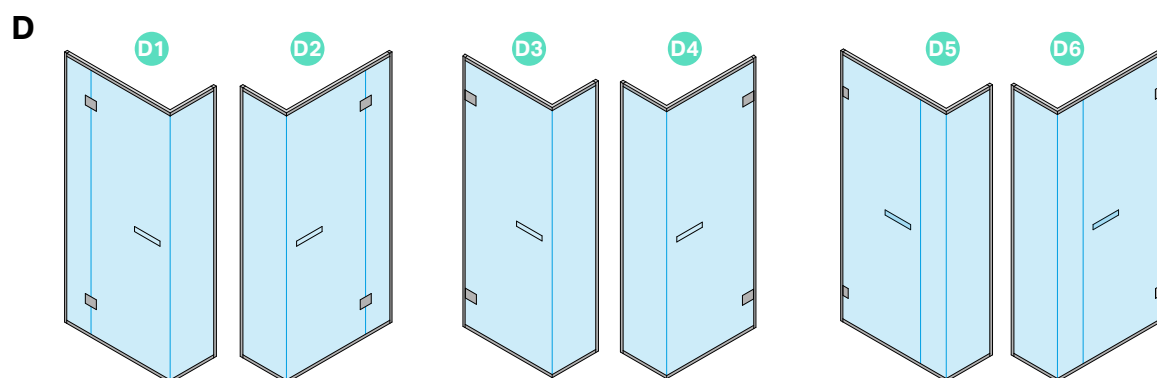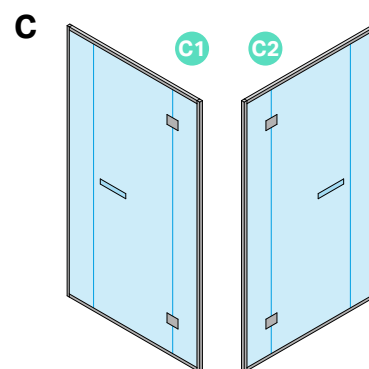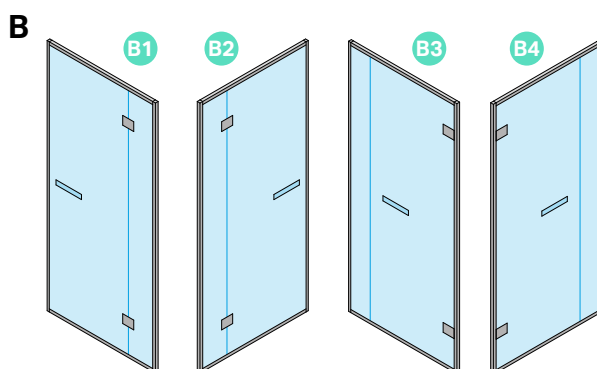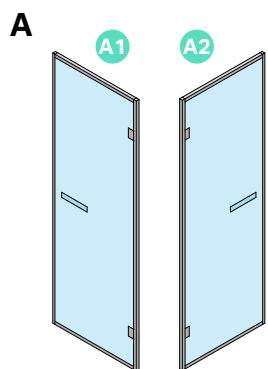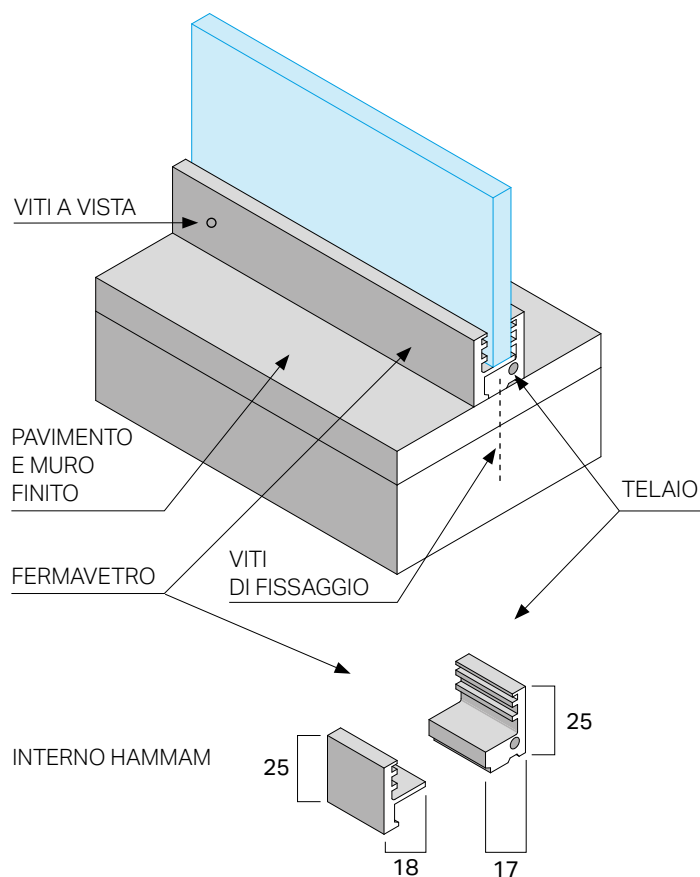[Download scheda tecnica](#)


Insulation kit

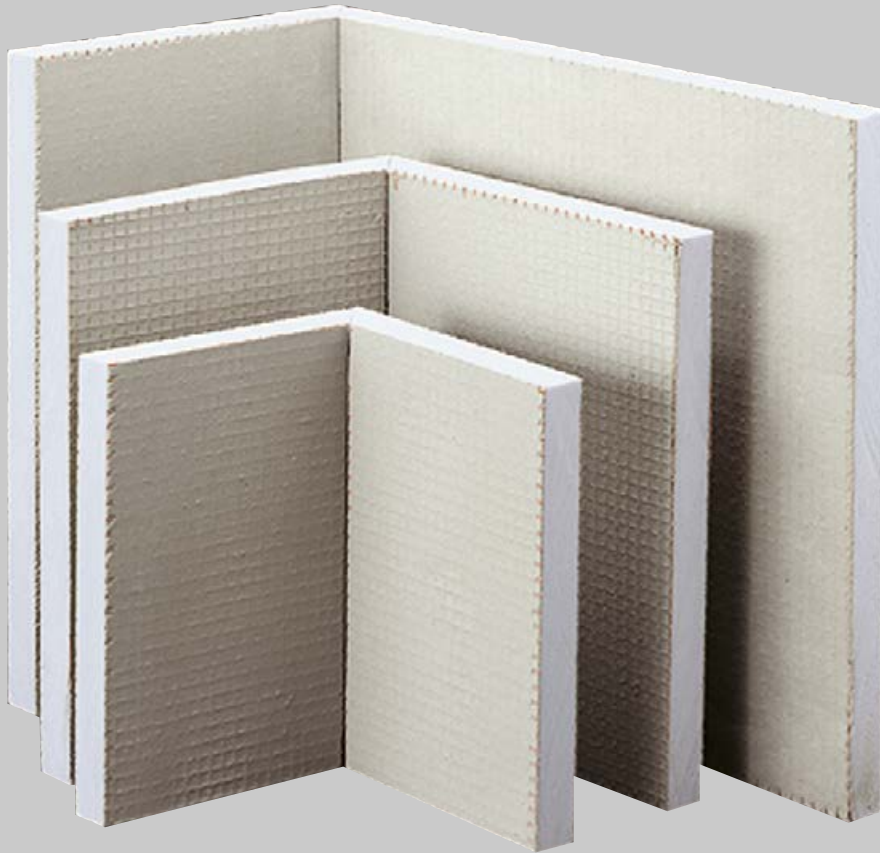


Insulation kit

model	surface (square meters)	panels (nr.)
01	12	16
02	15	20
03	21	28

INSULATION KIT

Technical information

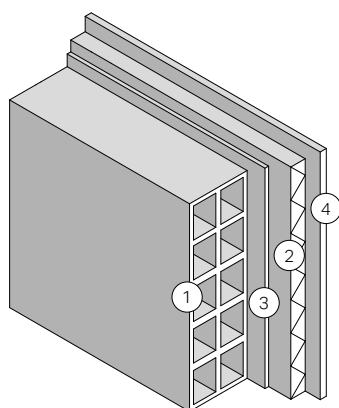

①

Wall : structure in brickwork and/or plasterboard, thickness at the discretion of the contractor. Maximum recommended height 230cm. Closed sloping ceiling (slope 10-15%) or domed to avoid the "rain" effect.

②

Insulation :
 Very high resistance to compression;
 Extremely limited exing;
 Does not absorb water;
 Stable, durable and will not rot;
 Easily worked with normal building tools;
 Excellent thermoacoustic insulation;
 Provides an excellent support for tiles, applied with thin layer of glue.

③

Glue: glue the insulating panels directly onto the wall with at least 6 gluing points per m2 then, when the glue has hardened, attach with scher plugs, 5 for panel. The adhesive for panel fixing is not supplied We recommend to use KERAKOL H40 or MAPEI KERAFLEX. Treat joints with a net or trim if possible.

④

Covering: Attach tiles, mosaic or any other material using the special glue.

MATERIALS

panels size cm 125 x 60


thickness cm 3

Sandwich panels with extruded polystyrene core with mortar reinforced with fibreglass mesh on both sides, can be covered with tiles equipped with fischer wall plugs

INSULATIONKIT

01 - UP TO 12 M ²	HA 55 01 0004	€ 1.570,00
02 - UP TO 15 M ²	HA 55 02 0002	€ 1.860,00
03 - UP TO 21 M ²	HA 55 03 0002	€ 2.430,00

Technical card download 

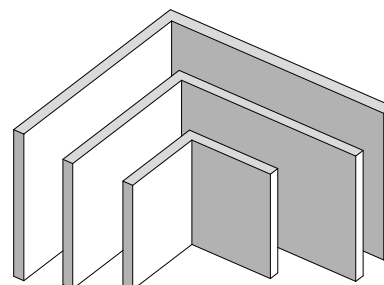

Fittings



- 66 **Mini**
- 67 **Topkapi**
- 68 **Bench ready for the covering
of choice**

MINI

DIMENSIONS
cm 48 x 36


MATERIALS
Shiny stainless steel
Iroko
White Cristalplant

FEATURES
Foldaway seat

MINI SEAT

Iroko	HA 65 10 0001	€ 1.025,00
Cristalplant	HA 65 00 0032	€ 990,00

Technical card download 

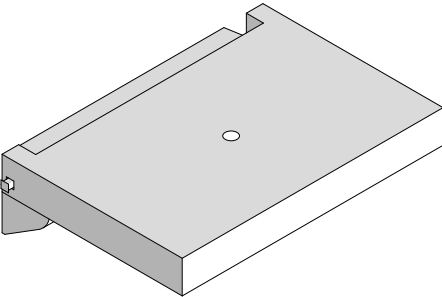


TOPKAPI

DIMENSIONS
cm 115 x 35 x 44 h

MATERIALS
316 stainless steel support
Seat in finish Iroko

TOPKAPI 115 SEAT

Iroko	HA 65 10 0021	€ 3.375,00
-------	---------------	------------

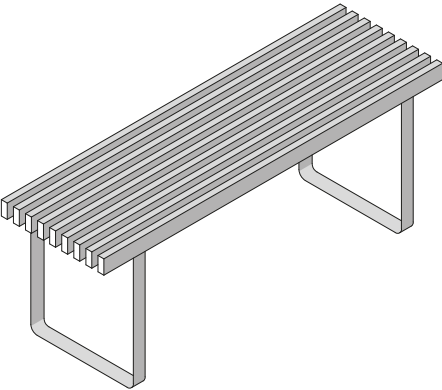


DIMENSIONS
cm 75 x 35 x 44 h

MATERIALS
316 stainless steel support
Seat in finish Iroko

TOPKAPI 75 SEAT

Iroko	HA 65 10 0020	€ 3.010,00
-------	---------------	------------




BENCH READY FOR THE COVERING OF CHOICE

DIMENSIONS
cm 49 x 100 x 42 h

MATERIALS
EPS

RECTANGULAR SECTION BENCH 1 MT

Module 1 M	SV 31 00 0008	€ 305,00
------------	---------------	----------




DIMENSIONS
cm 49 x 25 x 42 h

MATERIALS
EPS

RECTANGULAR SECTION BENCH END COVER

End Cover R.H.	SV 31 00 0009	€ 220,00
End Cover L.H.	SV 31 00 0024	€ 220,00




DIMENSIONS
cm 75+75 x 49 x 42 h

MATERIALS
EPS

RECTANGULAR SECTION CORNER BENCH

Corner 75	SV 31 00 0010	€ 615,00
-----------	---------------	----------



BENCH READY FOR THE COVERING OF CHOICE


With under-bench led lighting predisposition*

DIMENSIONS
cm 49 x 100 x 42 h

MATERIALS
EPS

ROUNDED SECTION BENCH 1 MT

Module 1 M	SV 31 00 0262	€ 350,00
------------	---------------	----------

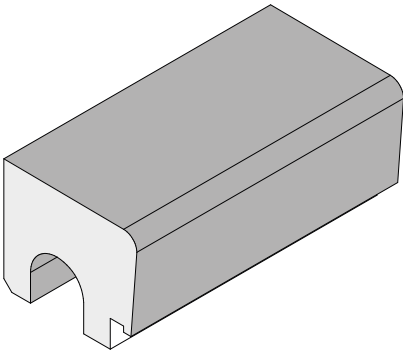


DIMENSIONS
cm 49 x 25 x 42 h

MATERIALS
EPS

ROUNDED SECTION BENCH END COVER

End Cover RH	SV 31 00 0263	€ 255,00
End Cover LH	SV 31 00 0264	€ 255,00

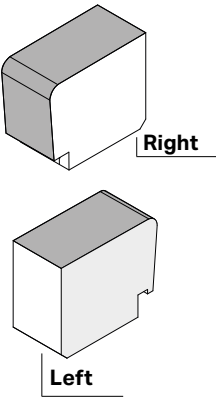


DIMENSIONS
cm 75+75 x 49 x 42 h

MATERIALS
EPS

ROUNDED SECTION CORNER BENCH

Cover 75	SV 31 00 0265	€ 650,00
----------	---------------	----------



*MOOD LIGHT
Under-bench LED lighting
[↗ see on page <73>](#)

BENCH READY FOR THE COVERING OF CHOICE


With under-bench led lighting predisposition*

DIMENSIONS
cm 49 x 100 x 42 h

MATERIALS
EPS

RECTANGULAR SECTION BENCH 1 MT

Module 1 M	SV 31 00 0257	€ 350,00
------------	---------------	----------

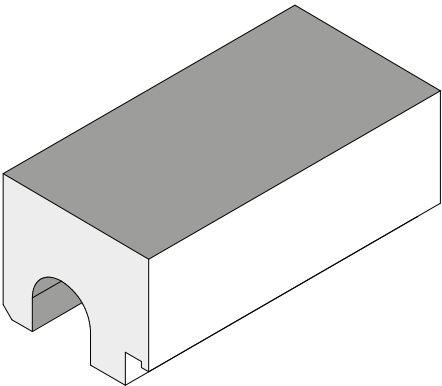


DIMENSIONS
cm 49 x 25 x 42 h

MATERIALS
EPS

RECTANGULAR SECTION BENCH END COVER

End Cover RH	SV 31 00 0258	€ 255,00
End Cover LH	SV 31 00 0259	€ 255,00

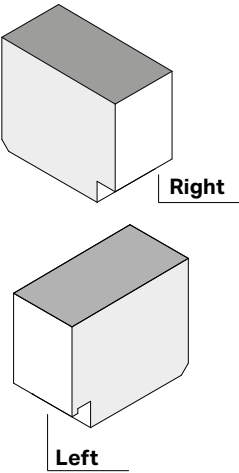


DIMENSIONS
cm 75+75 x 49 x 42 h

MATERIALS
EPS

RECTANGULAR SECTION CORNER BENCH


Cover 75	SV 31 00 0260	€ 650,00
----------	---------------	----------

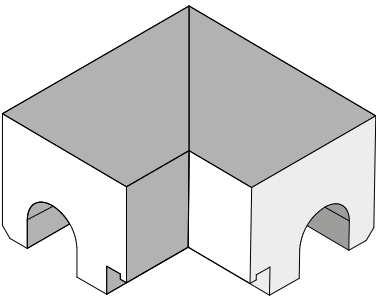

*MOOD LIGHT
Under-bench LED lighting
[↗ see on page <73>](#)

LAYOUTS FOR MEASURES MOOD LIGHT

Formats

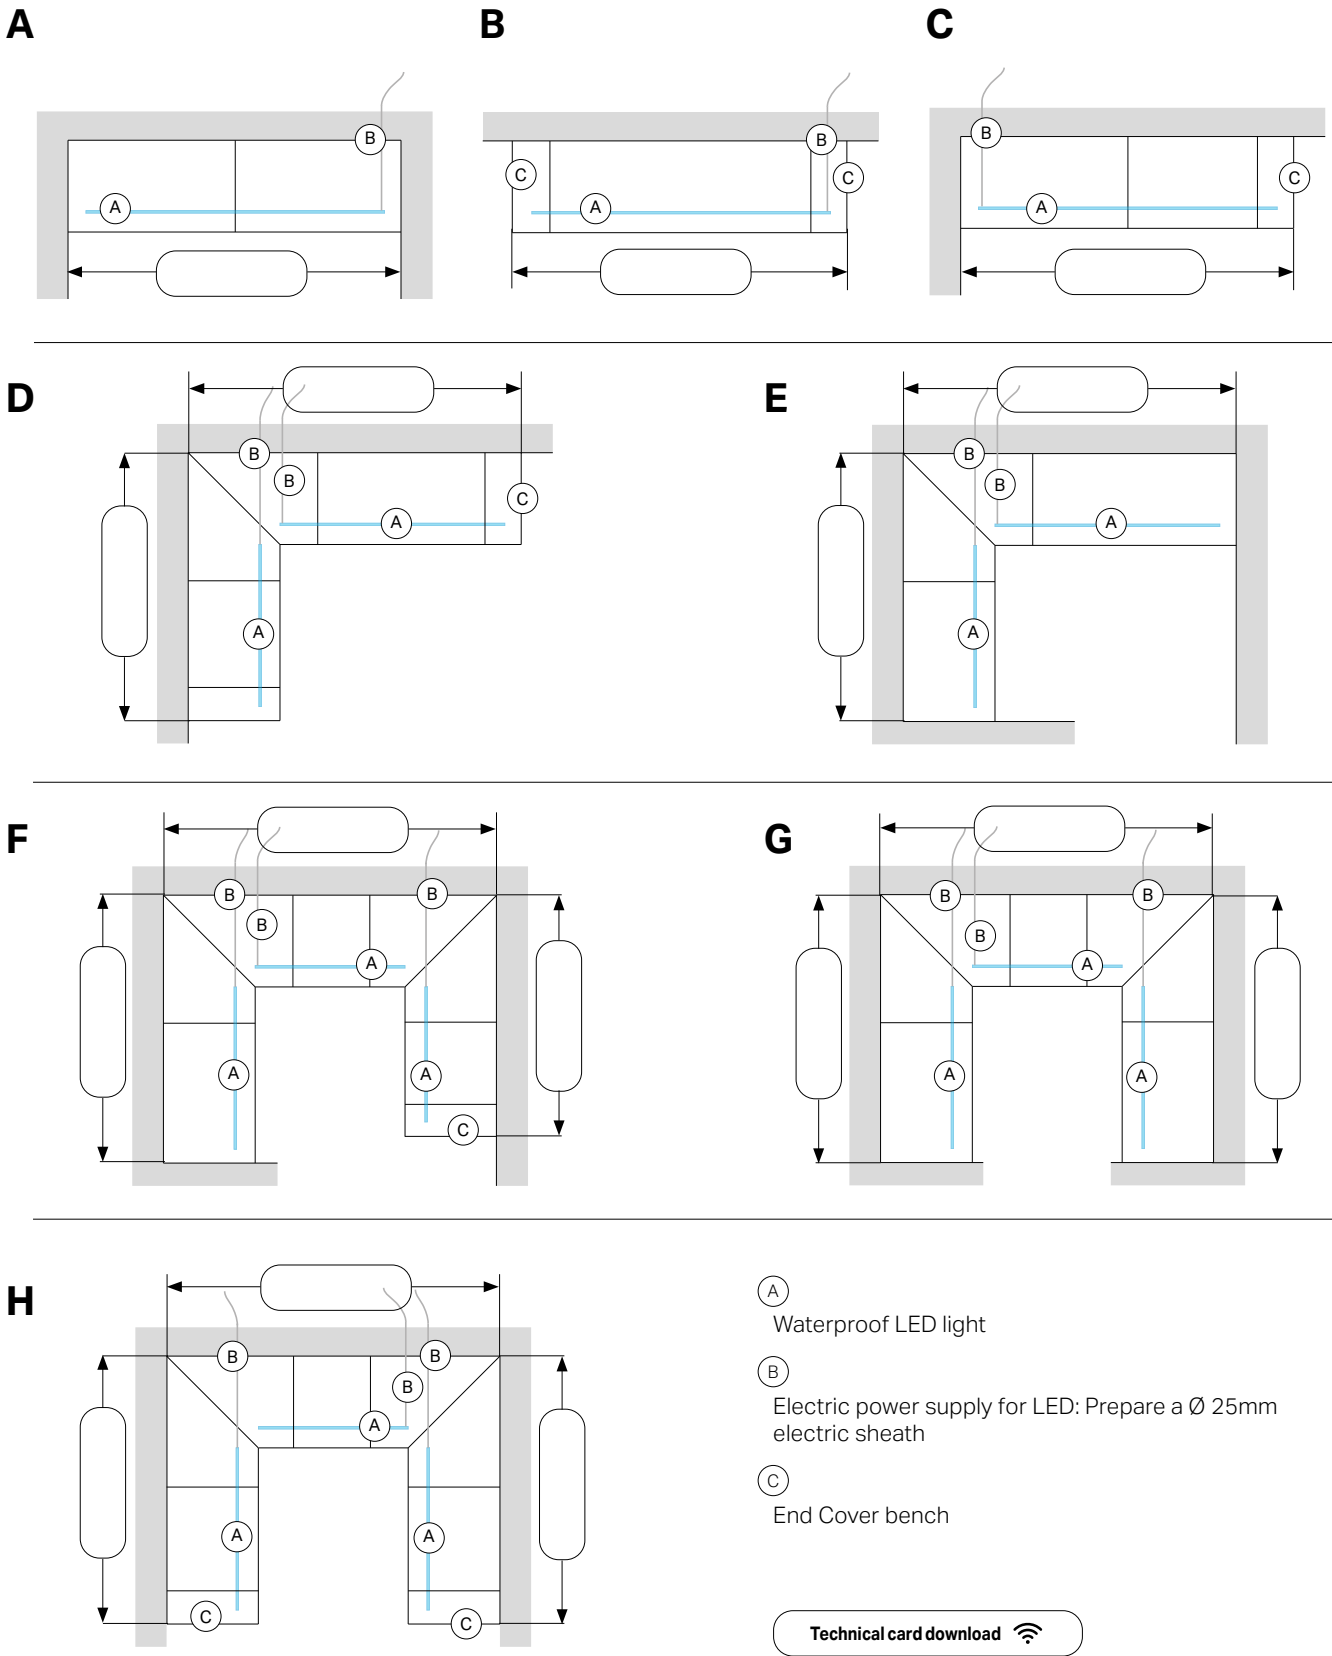

Accessories




KNEIPP SHOWER HOSE

FEATURES
White water hose with stop valve, bracket and water supply connection, chrome.


KNEIPP SHOWER HOSE		
Flush-mounted part	CH 90 00 0195	€ 155,00
External part and hose	CH 55 00 0190	€ 910,00
Total Price		€ 1.065,00

Technical card download 

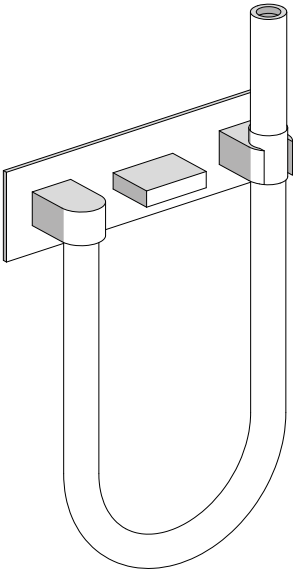


ACCESSORIES FOR BENCHES READY FOR THE COVERING OF CHOICE

*MOOD LIGHT UNDER-BENCH LED LIGHTING

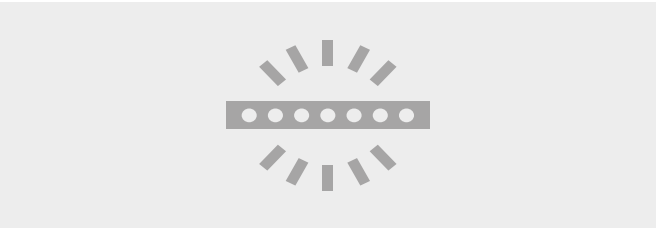

Mood light hammam
Waterproof LED mood light, warm white, under-bench installation.
24 volt / 10 w/m / 3.000 K

AE 20 00 0XXX	€/ml 410,00
---------------	-------------

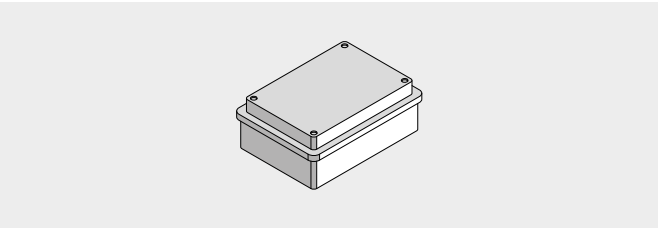

Mood light control module
Complete with 220-24V power supply for controlling LED lighting.
Max LED lighting length 7 metres.
Touch&Steam Smart, Easystem Smart, Inside, Nuvola Smart.

ME 99 00 0548	€ 549,00
---------------	----------

NOTES

Effe reserves the right to amend the features and prices of the products without any notice. Total or partial reproduction of text or illustrations of this price list is prohibited and is subject to legal sanctions.

FREIGHT

For shipments of taxable amounts of less than € 400,00 there will be a fixed charge of € 40,00.

THIS PRICE LIST REPLACES AND CANCELS THE PREVIOUS ONES

GENERAL TERMS AND CONDITION OF SALE

1 – CONTRACT AND ORDERS. These General Terms and Conditions of Sale shall apply to any and all business transactions and all future orders made by the Purchaser To Effegibi S.r.l. (The Company), even if these General Conditions are not expressly referred to, mentioned or expressly accepted by the Purchaser, and shall supersede any terms and conditions of the Purchaser, also in the case of a leasing company being involved. In any event receipt of goods, will express means acceptance of these General Terms and Conditions. All offers and quotations made by the Company are not binding until orders by the Purchaser have been accepted in writing by the Company, and the project has been signed. The Company's confirmation involving changes or additions to the order shall be deemed accepted by the Purchaser if no request of variation is sent by the Purchaser within days 15 of receipt of the variation. The Company is allowed to refuse new modifications after the expiration of the said deadline. Once a purchase order has been accepted by the Company, the Purchaser may not cancel it without the penalty for all costs incurred, including any damage and loss of profit. Prices are updated regularly, so If an order cannot be executed due to a delay caused by the Purchaser, prices will be updated. The Company reserves the right to request compensation if the location of installation is not suitable for installing the product, as per the pre-installation form provided, for reasons attributable to the purchaser.

2 - SPECIFIC REQUIREMENTS. The goods fulfill the general safety law legislation. It is the Purchaser's responsibility, before concluding the purchase, to verify that the location for installation is adequate, that the products are suitable for the use for which they intend to buy them and comply with the legislation of the country where they intend to use them.

3 – PACKING, DELIVERY AND FORCE MAJEURE Unless agreed otherwise, goods shall be delivered to the Purchaser in accordance with the Incoterms ICC rule 2020, Ex-Works (EXW) for any domestic purchase, and FCA for any international purchase, at Effegibi, Via Aldo Capitini,8, Mercato Saraceno (FC). Purchaser must clear the goods for export, bear any costs, and must load them. The Purchaser agrees to bear and comply with all applicable import and export control laws and regulations now or hereafter in effect. Packaging is borne by the Purchaser, it is billed at cost and it is non-returnable. The goods are the Purchaser's responsibility from the moment of the delivery even if the goods are collected by a carrier at the Company premises, even if sold free of carriage, or even if the Company bears the transport costs. In case of transport organized by the Company, at the time of receipt of the products, the Purchaser will have the duty to report any faults and defects which may have ocured during transport, by placing the receipt with reservation, in writing on the transport document, and inform the Company, by sending copy of the aforementioned document by fax or e-mail, no later than 5 (five) days from receipt of the products. Failing this, the Company will not be responsible for any damage to the products during transport, even if the same is carried out with full or partial risk on the latter. All delivery dates quoted are estimated, not guaranteed, do not form a term of this contract, and delivery date starts when all details and all the technical data is agreed, and on condition that the Purchaser has made the agreed payments on time. In case of delayed delivery of the products, the Purchaser will never have the right to cancel the order, revoke the acceptance of the offer or terminate the contract of sale and, except in cases of willful misconduct or gross negligence, the Company will not be obliged to pay the Purchaser any indemnity or compensation for any direct or indirect damage due to delay of delivery. The delivery term is extended in case of any delay, impediment or prevention attributable to the Client, or the Client's personnel, in case of technical difficulties, and when force majeure applies, such as any circumstances out the Company control (strikes, lockouts, war, fires, floods, delayed deliveries from sub-contractors, etc). In case of force majeure circumstances remain in force more than four (4) months each party shall have the right to cancel non-executed part of the Contract without compensation of any possible losses to the Supplier. In case of a situation of force majeure at the moment the contract is signed, the Purchaser cannot cancel the contract nor ask for compensation of any possible losses.Partial deliveries shall always be accepted, and therefore a delayed partial delivery, not preventing the use of the product, does not constitute a breach, as well as any delay related to the delivery. Delivery is considered completed when the Company informs the Purchaser that the goods are ready to be collected. From that date, all risks, costs, custody, maintenance and insurance, etc, are borne by the Purchaser. In case of delivery delay due to the Purchaser, the Purchaser shall pay € 30.00/day for the storage.

4 – TEST ON COMPLETION. Acceptance testing shall take place at the Company premises with its own technical procedures within 14 working days from the delivery. The Purchaser's attendance must be agreed upon in writing at least 5 days before. In any case, if the Purchaser does not attend the acceptance testing, or if it is agreed that he will provide for the test but he does not within the same term of 7 days, the tests s on completion shall be deemed to have been made with positive result and the product fully accepted by the Purchaser.

5 – PRICES, PAYMENT AND TERMINATION. Price quotations are always net, on an Ex Works basis, Incoterms ICC rule, exclusive of VAT, taxes, packaging, disassembly, insurance and costs of every kind. In the event that the Purchaser is in breach of these Terms and Conditions or any agreements between the parties, also if a leasing company is involved, or it goes into bankruptcy or liquidation either voluntary or compulsory or if a receiver is appointed in respect to the whole or any part of its assets or is insolvent or his credit rate deteriorates, the Com-

pany is entitled to: (I) withhold future deliveries; and/or (II) in case of delay of payment, apply default interests in compliance with art. 5 Italian Legislative Decree n. 192/2012, and on Dir. 2011/7/UE and further updating; (III) suspend the fulfillment of his own obligations or suspend the functional effects of the goods with no liability in respect of any damages suffered by the Purchaser or any third party; (IV) take possession of the goods, wherever located, and remove the same, without a legal process or Purchaser authorization, at Purchaser's expense; (V) waive discounts and any payment installments agreed and immediately seek the total amount due; and/or vi) keep the deposits and installments received as partial compensation, and reserve any right to seek damages. Without prejudice to the generality of the foregoing provisions, the Company shall not in any event be liable to the Purchaser for any indirect or consequential loss or damage. In any case the Purchaser shall not raise any question regarding the delivery of the goods until the balance is received by the Company. The Company can never be held responsible for claims or compensation for any amount exceeding the price of products, even in the event of resale of the goods to resellers or third parties. The Purchaser warrants that it or any person or entity which owns or controls, directly or indirectly, the Purchaser, or any of their directors, officers, employees: (I) is a target of any sanctions, export control, or import laws, or other regulations which are imposed from time to time by the EU, Switzerland, the United States, the United Kingdom, the United Nations (the "Sanctions"); (II) is not any entity 50% or more owned or any entity which is controlled, directly or indirectly, by one or more of the persons or entities in paragraph (I); (III) will not take any actions that cause it to become a target of any Sanctions, but if the Buyer becomes or expects to become target of any Sanctions, the Buyer must immediately notify the Seller. The Seller will be entitled to suspend or terminate at any moment with immediate effect the Contract if: (I) the Seller is prevented from exporting the Equipment (or parts thereof) due to any Sanctions, or (II) the Buyer or any person or entity which owns or controls, directly or indirectly, the Buyer, or any of their directors, officers, employees will become a target of any Sanctions and/or will violate any Sanctions. In all these cases the Purchaser will not be entitled to claim any compensation or damages whatsoever and it is under the Purchaser obligations to check if there is any sanction in place at the date of the signature of this agreement.

6 – WARRANTY AND DISCLAIMER. Warranty is guarantee only in the Country where the delivery of the item take place, and any discrepancy has to be communicated to the Company who will price the items accordingly; in any event the assistance in a Country different from the Country where the items have been delivered will be bear by the Purchaser. Company guarantees that all products shall remain free from defects in material and workmanship for a period of 24 months from date of delivery to the final Customer, as per the documentation that will be issued to the same by the Purchaser, provided that: (I) the Company receives written detailed notice of any non-conformance or defect in the goods within 8 days of receipt of the goods by the Purchaser, with registered letter, or, where the defect is not apparent on inspection upon delivery, within 8 days from the date such non conformance or defect is first discovered; and (II); the goods are installed and maintained in strict accordance with the Company's instructions and defects are not caused by Purchaser's personnel or collaborators or from inexperience, negligence or imprudence in the management of the product, not in accordance with the instruction given by the Company; and (III) such defect shall be deemed to the Company's satisfaction to be the sole responsibility of the Company; and (IV) force majeure does not apply; and (V) the Purchaser has paid in full; and (VI) the Purchaser has not used any unauthorized substances or essences or altered the product in any way; and (VII) no third party has been involved; and vii) such defect does not arise from ordinary wear and tear; (VIII) in any case the time limit to start a related proceeding must be within 24 months from the date of delivery. The above guarantee shall be limited to, at the option of the Company, and to the exclusion of any costs, either replacing, repairing or issuing credit. No exception to the time-limit applies, nor waiver applies, if the Company inspects the goods after the said term sub (I) and/or sub (VIII) has expired. If the goods have been purchased by a third party, the third party warranty will be directly transferred to the Purchaser. Any other liability of the Company, such as, for example, liability for direct, indirect or consequential damages, loss of profit, etc., is expressly excluded. All defective parts or parts to be replaced must be sent to the Company together with the clear motivation and notification of the defect, at the expense of the Purchaser, and remain the property of the Company. The costs for the assembly and disassembly of the parts to be repaired and / or replaced, as well as those for packing and shipping the repaired or replaced parts, shall be borne by the Purchaser. The Company shall not be liable for any defect arising from any design, specification or information supplied by or requested by the Purchaser. The Purchaser accepts the most detailed guarantee of content which will be provided together with the product. The Parties agree that the product are compliant with the standards of EU legislation. The Purchaser expressly accept that any non-compliance with internal regulations or standard, such as DIN or Onorm or others, does not constitute a defect of the items.

7 – RETENTION OF TITLE. The ownership of the goods will not pass from the Company to the Purchaser until the Purchaser has fully paid for the goods, including possible interest or other fees incurred due to overdue payment. The Purchaser can use the goods, but until the goods have been paid in full, the goods must be stored separately from goods belonging to third parties; labeled as the Company's property; the Purchaser must allow the Company access to his premises to verify that the obligations are being complied with or to repossess the goods in case of breach of contract. Should the Purchaser resell the Products before completing payment to the Company, the Purchaser shall hold as trustee for the Company all monies recovered from the sale of the goods. If the Purchaser has incorporated the goods into other articles, upon request of the Company and at its own expenses, shall separate the goods and redeliver them to the Company. In case of outstanding payments, or in the case where the Purchaser goes into bankruptcy or liquidation either voluntary or compulsory or if a receiver is appointed in respect to the whole or any part of its assets or is insolvent or his credit rate deteriorates, the Company has the right to: (I) enter the Purchaser's premises to repossess the goods, as well as third parties premises if the goods have been sold, without Purchaser permission or without notification; and (II) take any legal action, to keep any deposit received as partial payment and to seek damages. If the law of the country where the goods are located after delivery does not permit the Company to repossess the property, the Company shall be entitled to the benefit of such other rights in respect thereof as such law permits. The Purchaser shall give every assistance in taking any measures required to protect the Company's right of property or such other rights as aforesaid.

8 - LIEN. Without prejudice of the retention of title clause n. 7, the Company shall have a general lien in respect of all sums due from the Purchaser upon all products to be supplied to the Purchaser or upon which work has been undertaken on the Purchaser's behalf and, upon

14 days written notice to the Purchaser, may sell such products and apply the proceeds towards the satisfaction of any sums due to the Company from the Purchaser. The Company has also the right to register lien on the goods and the Purchaser shall take any necessary step, otherwise the Agreement will be terminated.

9 –INTELLECTUAL PROPERTY. Any and all inventions, patent applications, patents, copyrights, trademarks and trade names, trade secrets, and information embodying proprietary data existing and owned by the Company as of the date of the order or made or conceived by employees, consultants, representatives or agents of the Company during the term of this Agreement, shall be and remain the sole and exclusive property of the Company. Purchaser shall have no rights therein. The Company reserve the right to change, at anytime, trademark, product details, and any of his distinguishing signs or product's details.

10 – CONFIDENTIALY. The Purchaser undertakes to treat with the utmost confidentiality all the information/data/designs/know-how/ documentation transmitted by the Company or that it may come to know in connection with the execution of any sale contract, even if they is not marked or identified as secret or confidential, to adopt any and all measures required in order for its employees and collaborators do not disclose the confidential information to third parties or use it in an inappropriate way. The confidential information shall not be copied or reproduced in any way, unless with the prior written consent of the Company, and all the copies of the confidential information shall be immediately returned to the Company upon simple written request of the same.

11. SEVERANCE AND WAIVER. If one or more clauses of these conditions is considered to be null or void according to the applicable law, the remaining clauses shall remain in force and the Parties agree to fulfil any lawful reciprocal obligation which might pursue the same objective of the clause or clauses which have been declared null and void The failure to exercise or delay in exercising a right or remedy provided by this General Terms and Conditions or by law does not constitute a waiver of the right or remedy or a waiver of other rights or remedies. No single or partial exercise of a right or remedy shall prevent any further exercise of the right or remedy or the exercise of any other right or remedy.

12 – GOVERNING LAW AND JURISDICTION. Any dispute or claim arising out of or in connection with these GTCS or subject matter shall be irrevocably governed and construed in accordance with the exclusive law of Italy specifically to the exclusive jurisdiction of the Courts of Forlì, Italy. To the extent allowed by law the Company may take concurrent proceedings in any number of jurisdictions.

13 - PERSONAL DATA. With reference to the Data Protection law, the personal data processing is performed in full respect of the Purchaser rights, fundamental freedom and dignity and is aimed at fulfilling accounting and administrative legal obligations. For this reason, the processing has its own legal basis in the execution of the contract and legal obligations. The Parties herewith declare to have received in full all information in accordance with art. 13 of Reg. (EU) 679/16 and give consent to the processing of personal data and the data of the Company they represent.

14 - COMMUNICATIONS. Any notice or other communication is considered valid and binding when sent to the parties at their respective e-mail addresses as stated in the order or in their web-sites.

15 - WARNING - Certain products include electronic components whose correct operation can be verified remotely through the voluntary installation of a dedicated app by the user of the product. The information in the app indicates how the data collected is processed. Following the installation, the Company and the electronic component Producer will be able to remotely verify the use of the product, as well when datas are collected for product analysis purposes. If the Client is a Reseller, in any event, he undertakes to inform the final Client about the aforementioned app and ensure the Company's GTC of sale are accepted.

Notes

